



Vertical Blinds and Conservatory Awnings

markilux

markilux Vertical Blinds and Conservatory Awnings

Experience and knowledge by tradition. Ideas and creativity for the future.



markilux Vertical Blinds & Awnings

Vertical cassette blinds and awnings

markilux 710/810	6
markilux 720/820 and 725/825	8
markilux 750/850	10
markilux 760/860	12
markilux 869/869 tracfix	14
markilux 620 tracfix	16
markilux 660 tracfix	18

Drop-arm cassette awnings

markilux 730/830	22
------------------------	----

Marquisolettes

markilux 740/840 and 745/845	24
------------------------------------	----

Triangular shading

markilux 893	26
--------------------	----

markilux Conservatory Awnings

Exterior sun protection

markilux 8800/8800 tracfix	30
markilux 8850	32

Conservatory awnings for small glass areas

markilux 780/880	34
------------------------	----

Under-glass awnings

markilux 889/889 tracfix	36
markilux roof festoon (internal shading)	38



markilux Optional Accessories

markilux quality “made in Germany”	40
markilux awning covers “world of colours”	42
markilux Lounge and standard colours	44
markilux optional accessories	from 45
markilux awnings at a glance	48



markilux

markilux vertical cassette blinds

All markilux cassette blinds have all-round protection. The awning cover is stored in a closed cassette when retracted thus keeping it immaculate for longer. Some markilux vertical cassette blinds are available with both round (“markilux 8xx”), square (“markilux 7xx”) or rectangular (“markilux 6xx”) cassette shapes. What you settle for depends on the style of house or your personal taste.



markilux 710/810

6 | 7



markilux 720/820 and 725/825

8 | 9



markilux 750/850

10 | 11



markilux 760/860

12 | 13




markilux 869/869 tracfix

14 | 15




markilux 620 tracfix

16 | 17

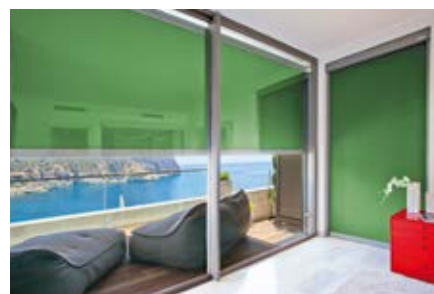

markilux 660 tracfix

18 | 19

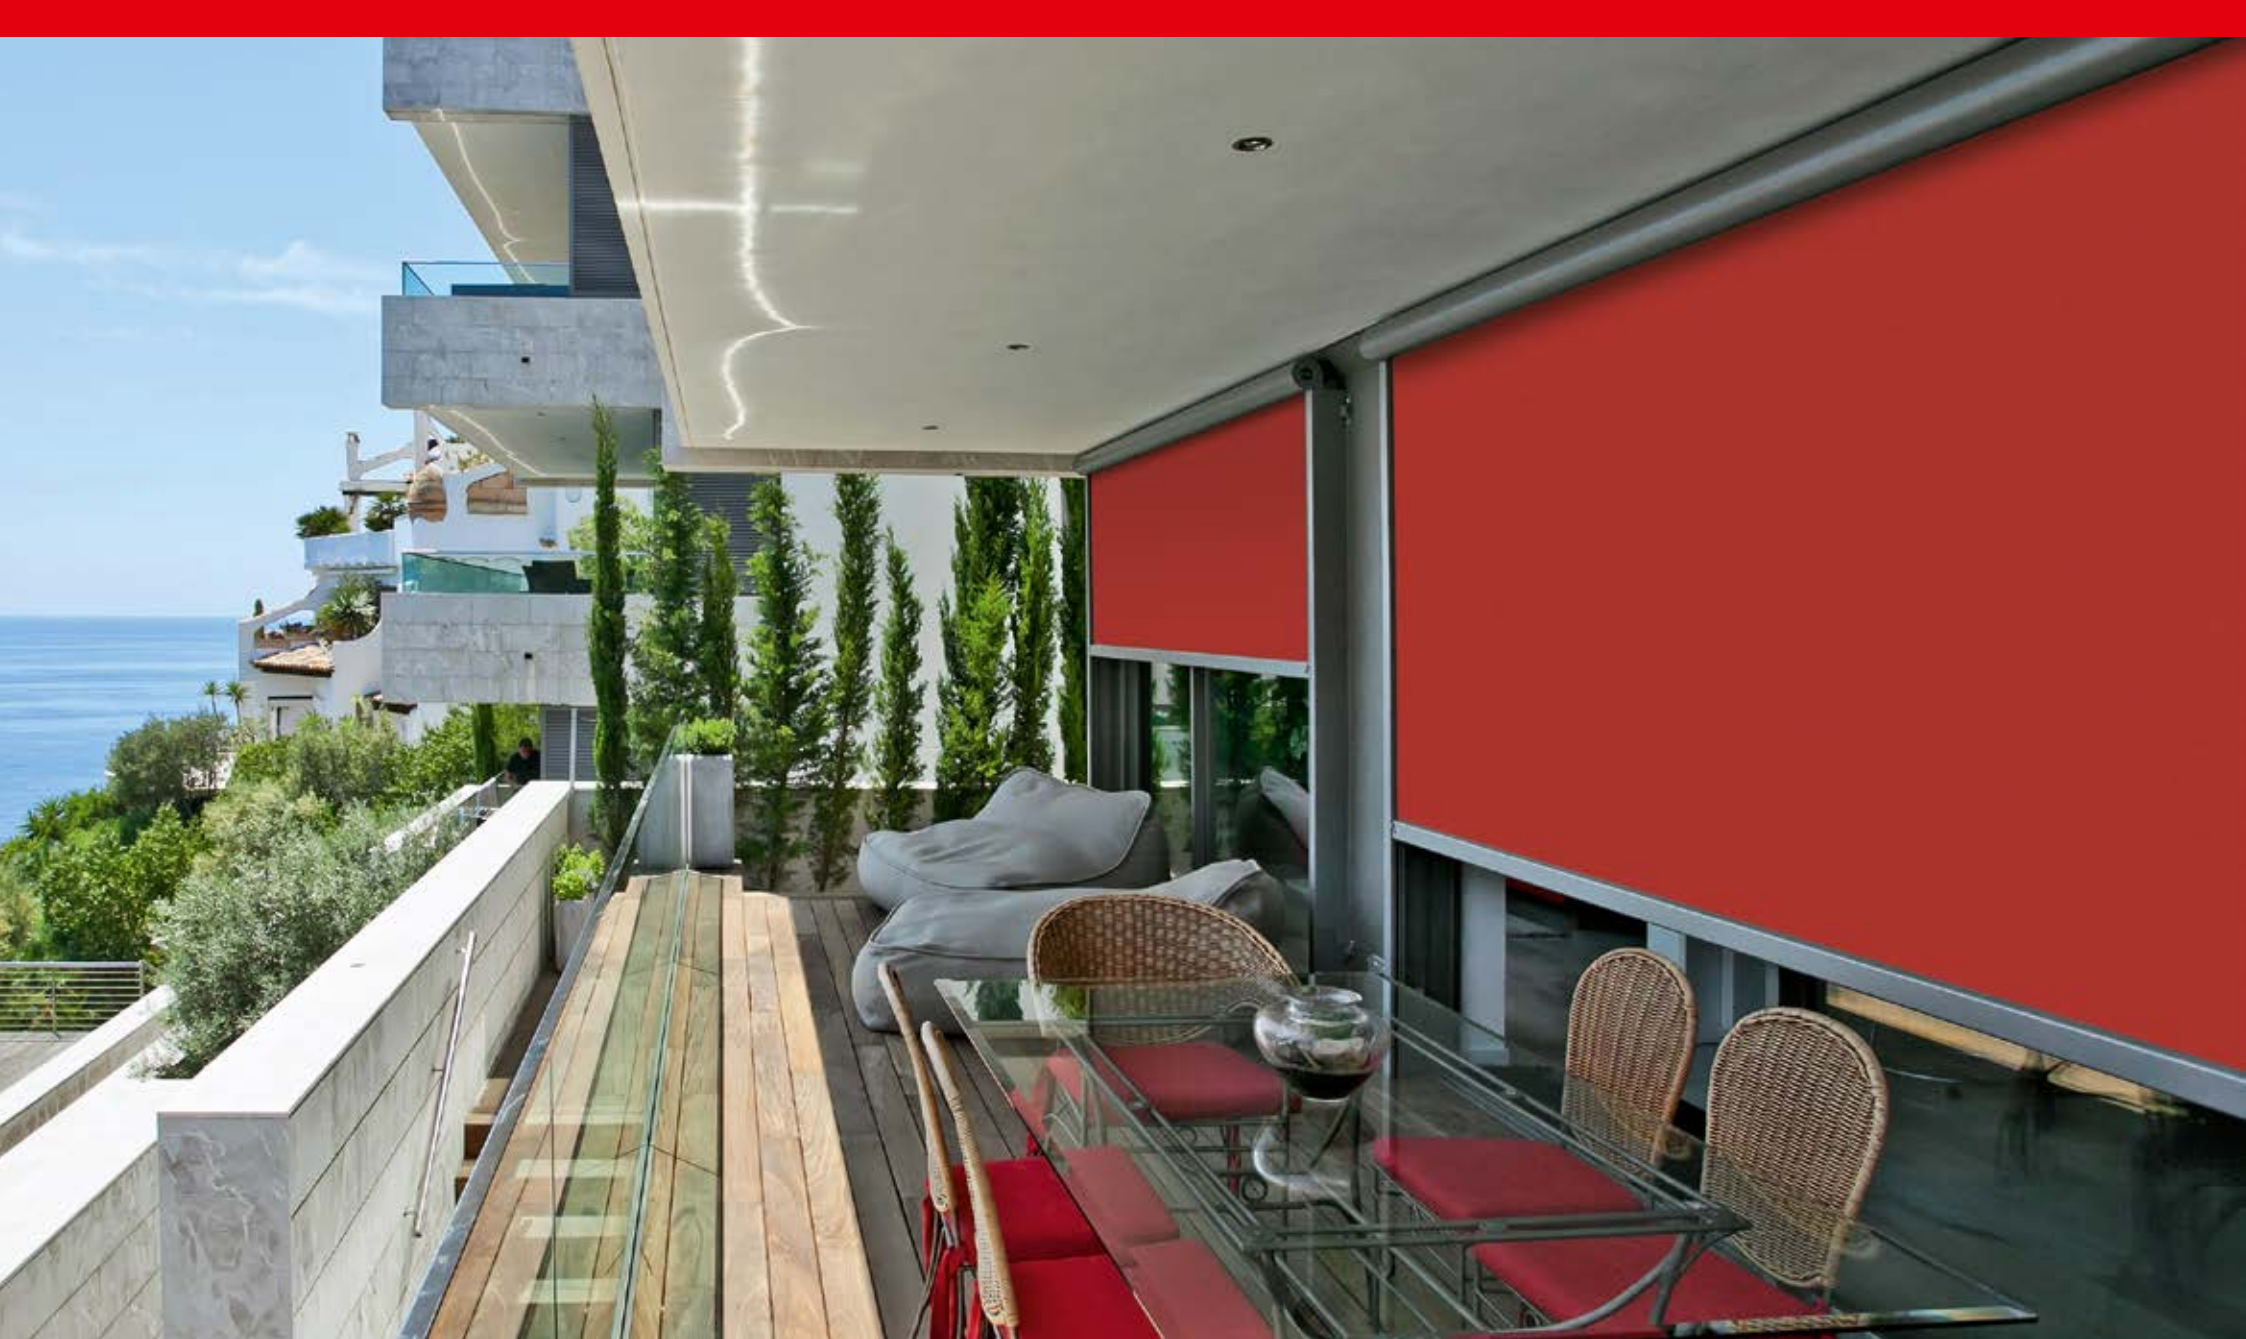

Save energy by using solar protection systems

In summer the shading of windows and glass panels ensures that air conditioning systems are required less often. During cooler periods, the exterior shading can be retracted during the day so that the energy of the winter sun can help to heat up the building.

markilux



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

Maximum width: 500 cm
Maximum height: 350 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 710/810

Shade: as required. The markilux 710 and 810 are the classics when it comes to window blinds:
Neighbours: as required. They are as ideal for providing protection from prying eyes as they are for
Design: as required. regulating temperature – rooms can be kept at a pleasant temperature by regulating the amount of shade and sunlight. The lateral cable guide is protected by a plastic coating.



Gear exit point
 Very robust with a universal joint and practical in use.



Lateral guide cables
 Plastic-coated wires, protected and well hidden, for an inconspicuous appearance.



Reveal fixture
 With the square cassette of the markilux 710.



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

Maximum width: 300 cm
Maximum height: 350 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 720/820 725/825

Sun: reduced. The markilux 720 and 820 provide perfect shading. And, depending on the choice of cover, you can still see outside – however, you are still protected from the sun and prying eyes.
Forecast: good.
Looks: perfect.

The markilux 720 and 820 are suitable for direct fixture to the wall – using sturdy angled guide rails. The markilux 725 and 825 can be stood off from the wall thanks to the various bracket combinations available.



Face fixture
markilux 720/820
(720 is depicted)

Variable stand-off fixture:
markilux 725/825
(825 is depicted)



markilux 825
Guide tracks with stand-off fixture.



markilux 820
With angled guide rails.



markilux 725 / 825
Decorative cap for track bracket
(optional).



markilux 725 / 825
Cover profile to block the gap
between cover and track (optional).



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Dimensions

Maximum width: 500 cm
Maximum height: 350 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 750/850

Climate: mastered.
Technology: sophisticated.
Material: strong.

The markilux 750 and 850 are very close to the ideal in terms of their effectiveness as solar protection products – the sturdy, stainless steel guide rods make them aesthetically very appealing and turn them into highly attractive vertical cassette blinds.

All components require minimal maintenance and are protected against corrosion.



markilux 750

markilux 850



Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.



Guide rods

Stand-off bracket with stainless steel guide rods.



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Dimensions

Maximum width 400 cm up to a unit height of 250 cm
Maximum width 325 cm up to a unit height of 400 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.



Rated to wind resistance class 3 because of the vario-belt tensioning system (corresponds to Beaufort 6)

markilux 760/860

Wind: available. The markilux 760 and 860 also give perfect shade in windy conditions: They remain stable up to Beaufort 6 and provide a relaxed atmosphere in the enclosed living area.

Tension: ideal.

Relaxation: equal.

This is due to the vario-belt tensioning system which guarantees an especially taut cover.



markilux 760

markilux 860



Architectural touches

Outside coloured fabrics give a visual lift to the façade and inside they create a heightened sense of well being.



Accessories

To improve the appearance even more, decorative caps for the picture brackets and a profile to hide the gap between guide track and cover can be ordered (optional).



Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.



Rated to wind resistance class 3 because of the vario-belt tensioning system (corresponds to Beaufort 6)

Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

markilux 869: Manual operation with stainless steel winding handle, Optional: Hard-wired or radio-controlled motor with markilux remote control.
markilux 869 tracfix: Hard-wired motor as standard, Optional: Radio-controlled motor with markilux remote control.

Dimensions markilux 869

Maximum width 600 cm up to a unit height of 350 cm
Maximum width 550 cm up to a unit height of 400 cm
Maximum width 500 cm up to a unit height of 450 cm
Maximum width 400 cm up to a unit height of 600 cm

markilux 869 tracfix

Maximum width 600 cm up to a unit height of 350 cm
Maximum width 550 cm up to a unit height of 400 cm

markilux 869 **tracfix**

Areas: large. The markilux 869 is a reliable climate enhancer, especially for large areas. It remains stable up to Beaufort scale 5 or 6, and provides protection from the sun and prying eyes. This is thanks to the vario-belt tensioning system which guarantees an especially taut cover.

Wind: existing.

Tension: ideal.

The optional tracfix system ensures that the cover is held firmly in place at the sides – and the panorama window gives a perfect view outside.




Customisation options

For intelligent control systems and the full range of colours and optional accessories, such as e.g. the markilux panorama window, please refer to page 40.



Beautifully finished

Graceful yet strong: the stable front profile finishes completely flush with the slender guide tracks when fully extended.

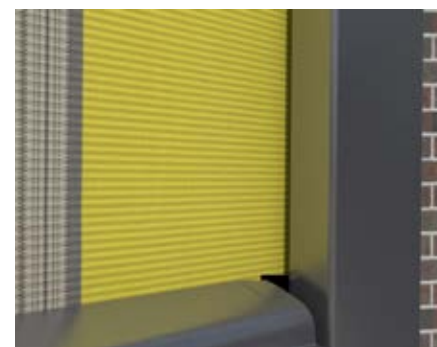

tracfix system

For secure, lateral cover guidance and a gap-free, closed look (optional).



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Hard-wired motor as standard.
Optional: Radio-controlled motor and markilux remote control.

Dimensions

Without flyscreen: Maximum width 300 cm up to a unit height of 300 cm
With flyscreen: Maximum width 200 cm up to a unit height of 250 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 620 **tracfix**

Weather: changeable. The markilux 620 tracfix kills two birds with one stone:
tracfix: sealed. It protects against the sun and prying eyes, and closes perfectly
Privacy: on. at the sides thanks to the tracfix system. And with the optionally
 integrated flyscreen, it also protects against insects.

The frame can be closed at the bottom with an additional profile –
 in which case the bottom profile is equipped with a brush seal.



Flyscreen

With lock and release mechanism.
 The tension in the flyscreen is provided
 by an internal spring mechanism.



tracfix system

For secure, lateral cover guidance
 and a gap-free, closed look.



Bottom frame profile

Blind extended with additional frame profile
 and brush seal to finish off the system at the
 bottom (optional).



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Hard-wired motor as standard.
Optional: Radio-controlled motor and markilux remote control.

Dimensions

Without flyscreen: Maximum width 300 cm up to a unit height of 300 cm
With flyscreen: Maximum width 205 cm up to a unit height of 250 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 660 **tracfix**

Wind: no problem. The markilux 660 tracfix kills two birds with one stone: It protects against the sun and prying eyes, and closes perfectly along the sides thanks to the tracfix system. With the optional flyscreen, insects are banished outside. The tensioning system also provides optimum cover tautness thanks to the vario-belt system it uses.

Insects: no chance.

Climate: simply perfect.

The frame can be closed at the bottom with an additional profile – in which case the bottom profile is equipped with a brush seal.




Flyscreen

With lock and release mechanism. The tension in the flyscreen is provided by an internal spring mechanism.



tracfix system

For secure, lateral cover guidance and a gap-free, closed look.

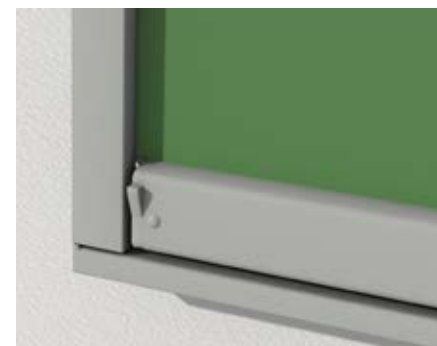

Bottom frame profile

Blind extended with additional frame profile and brush seal at the bottom to complete the system (optional).

markilux drop-arm cassette awnings, marquisolettes and triangular shading



markilux 730/830

22 | 23

Pleasant shade – and always enough light: The inclined position of the drop-arm awning ensures that you always hit just the right angle. After all it's not a question of light or dark but of getting the right “shade” in between.



markilux 740/840 and 745/845

24 | 25

The markilux marquisolette offers an ideal blend of visibility and shade. This perfect combination of vertical blind and drop-arm awning makes the marquisolette the all-rounder among vertical systems.



markilux 893

26 | 27

Whether fitted internally or externally or to shade the area on the inside of a cupola or atrium – the markilux 893 is the product you need for triangular windows and glass areas. Equipped with an innovative mechanism that provides ideal cover tension.

Square or round?

Some markilux vertical blinds are available both with round (“markilux 8xx”) and square (“markilux 7xx”) cassettes. What you settle for depends on the style of house and your personal taste.



Advanced, reliable technology as well as high-class materials and first-rate workmanship ensure the sustainability of your façade and turn it into a highly functional work of art.

markilux



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

Maximum width 700 cm as a single unit. Two single units coupled together are available up to a width of 800 cm.

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 730/830

Outside: paradise. The markilux 730 and 830 are drop-arm cassette awnings:
Inside: ideal climate. Each arm pivots through an angle of up to 140° so that
Overall: like a holiday. the required light and shade situation is as perfect as can be.
 Special gas pistons in the drop arms ensure smooth movement
 and guarantee a perfectly tensioned cover.

A discreet, powder-coated, aluminium cassette – round or square.
 Individual shade can be created through the various drop-arm and
 cover lengths. Sun protection, made to fulfil your personal needs.



markilux 730

markilux 830



Accro bars

Two telescopic, wedge-in accro bars are optionally available (for heights from 220 cm to 320 cm). Available up to a maximum width of 400 cm.



Gas pistons

For a taut cover and smooth operation of the drop arms.



Closing mechanism

Detail: front profile on the markilux 730/830.



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

Maximum width 300 cm up to a unit height of 300 cm. Two single units coupled together are available up to a width of 500 cm.

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 740/840 745/845

Requirement: non-waivable.
Fulfilled: yes.
Climate: ideal.

The markilux 740 (with square cassette) and 840 (with round cassette) are the perfect combination of vertical blind and drop-arm awning: The top part offers vertical protection; the lower part allows you to adjust the climate and the amount of light coming in thanks to the position of the drop arms. Gas pistons in the drop arms ensure that the cover stays taut.

The markilux that stays in place particularly well – thanks to a top-rate slide mechanism with improved gas piston technology and windlock device. The automatic locking device in the guide tracks prevents the arms from lifting in windy conditions.



Face fixture:
 markilux 740/840
 (markilux 740 depicted)

Variable stand-off fixture:
 markilux 745/845
 (markilux 845 depicted)



Gas pistons

For a taut cover and smooth operation of the drop arms.



markilux 845

Guide tracks with stand-off fixture.



markilux 840

For direct fixture to the wall using angled aluminium guide rails.



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Hard-wired motor as standard.
Optional: Radio-controlled motor with markilux remote control.

Dimensions

Maximum width: 400 cm
Maximum extension: 500 cm

Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.

markilux 893

Extraordinary situation: yes. The markilux 893 is an exception to the rule: Triangular windows or skylights are given made-to-measure sun protection. It can be installed vertically, horizontally or at any angle.
Problem: no.
Solution: perfect.

A special tensioning system utilising gas pistons and strong tensioning cords in the guide tracks provides a perfectly taut cover. All components require minimal maintenance and are protected against corrosion.



Guide tracks

High tensile strength tensioning cords for optimum cover tension.



Highly attractive

Rounded cassette and patented clip-on fixture of the brackets to the tracks.



Brush seal

The cassette with brush seal protects the cover against the ingress of dirt when retracted.

markilux conservatory awnings

Intelligent climate protection – both for the environment and for the home: markilux vertical blinds and conservatory awnings regulate temperature, cool, store heat and protect. They create a perfect climate in all weather conditions, with minimum fuss. Intelligent technology and perfect visuals included.

Conservatory awnings – external



markilux 8800/8800 tracfix 30 | 31

Conservatory awnings – external



markilux 8850 32 | 33

Conservatory awnings – external / under-glass



markilux 780/880 34 | 35

Under-glass awnings



markilux 889/889 tracfix 36 | 37

Conservatory awning – internal





markilux roof festoon 38 | 39



The classic conservatory, the glass-covered veranda, loggia or pergola: markilux conservatory awnings regulate the light influx that brightens your winter and cools your summer.

markilux

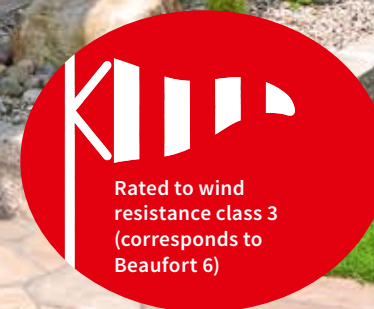

Rated to wind resistance class 3 (corresponds to Beaufort 6)

Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

An electric motor is standard. Optionally, a silentec motor or a radio-controlled motor with markilux remote control are also available.

Dimensions of markilux 8800

A maximum width of 700 cm is available up to an extension of 450 cm, a maximum extension of 700 cm up to a width of 500 cm.

Dimensions of markilux 8800 tracfix

A maximum width of 600 cm is available up to an extension of 450 cm, a maximum extension of 600 cm up to a width of 500 cm.

markilux 8800 **tracfix**

Conservatory: large. The 2013 iF product design award – for excellent design – and a special mention at the 2014 German Design Award, are confirmation of the perfectly thought through concept behind the markilux 8800. And if that is not enough – it operates immaculately, too.

Comfort: total.

Design: rewarded.

Areas up to 36 m² (with tracfix max. 30 m²) can be shaded with a single cover. A permanently high cover tension is achieved through two special gas piston components operating independently of one another. Round, square and functional: A round cassette and square guide tracks similar to the profiles found in many styles of conservatory.




Customisation options

For intelligent control systems and the full range of colours and optional accessories, please refer to page 40.



Elegant appearance

When fully extended the front profile sits flush with the end of the guide tracks.

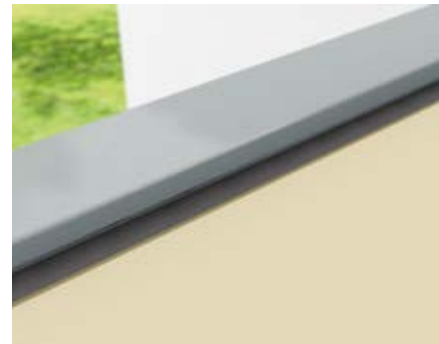

tracfix system

For protected, lateral guidance of the cover and a gap-free look (optional).



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Customisation options

For additional smart extras that enhance the luxury of your awning, such as intelligent automation systems and remote control operation, please refer to page 40.

Dimensions

A maximum width of 650 cm is available up to an extension of 400 cm, a maximum extension of 500 cm up to a width of 500 cm.

markilux 8850

Conservatory: magnificent. The markilux 8850 has been developed specially for bevel-edged conservatories –
Design: individual. the guide tracks can be indented up to 100 cm and can overhang the outermost
Problems: none. bracket by up to 100 cm, giving even even more protection from the sun.
 The round cassette and angular guide tracks harmonise perfectly with shapes found in contemporary conservatory design. Flexibility constructed specifically for bevel-edged conservatories.

When closed the awning cover is protected from the weather by the fully encompassing cassette. Permanently high cover tension is achieved by way of two special gas-piston mechanisms operating independently of one another.



Highly attractive

When fully extended the round front profile harmonises perfectly with the curved end caps of the guide tracks.



Operation

A hard-wired motor is standard. Optionally, a silentec motor or a radio-controlled motor with markilux remote control are also available.



Rated to wind resistance class 3 because of the vario-belt tensioning system (corresponds to Beaufort 6)

Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

A maximum width of 400 cm is available up to an extension of 250 cm, a maximum extension of 400 cm up to a width of 325 cm.

Customisation options

For additional smart extras that enhance the luxury of your awning, such as intelligent automation systems and remote control operation, please refer to page 40.

markilux 780/880

Sheltered seating: always. With the markilux 780 and 880, the perfect amount of light, sun and
Sun: as required. warmth can be enjoyed in conservatories 365 days a year. They are ideal-
Climate: like a dream. ly suited to smaller areas of glass – up to approx. 12 m².

The vario-belt tensioning system provides optimum cover tension. If fixed externally, they can withstand wind speeds up to and including Beaufort force 6.



markilux 880

markilux 780



Highly elegant appearance

Compact, discreet, powder-coated cassette. Can be installed both internally and externally.



Technical Specification

Larger units are supplied with a cover support tube to limit sag in the cover during extension and retraction.



Optional accessories

A cover profile to hide the gap between cover and track and decorative bracket caps are available.



Covers recommended by markilux

Cover patterns from the exclusive visutex series, sunsilk snc, sunvas snc and, for specific applications, covers from the specials collection.

Operation

Manual operation with stainless steel winding handle. Optionally, for greater ease of operation: hard-wired motor or radio-controlled motor with markilux remote control.

Dimensions

markilux 889: Maximum width 600 cm up to an extension of 450 cm, maximum extension 600 cm up to a width of 325 cm.
markilux 889 tracfix: Maximum width 600 cm up to an extension of 400 cm.

markilux 889 **tracfix**

Patio: canopied. The markilux 889 turns a patio with a glass canopy into a favourite outdoor area, with just the perfect temperature. It delivers the ideal amount of shade to your patio. If the weather changes the awning is quick and easy to use, moreover it is designed for large areas – and thanks to the special tensioning system, the cover is perfectly tensioned when the awning is completely extended.

Sunlight: adjustable.


Favourite spot: right here.

When retracted the cover is protected from the weather by the all encompassing cassette. The optional tracfix system offers a completely closed appearance with no gap between the awning cover and the tracks.




Intricate technology

The front profile finishes completely flush with the end of the guide tracks when fully extended.

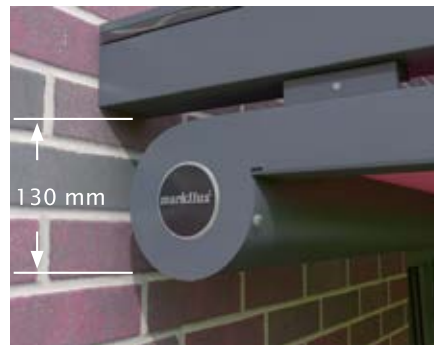

Compact cassette

Only 130 mm in height: the elegant and compact cassette of the markilux 889 with square guide tracks.

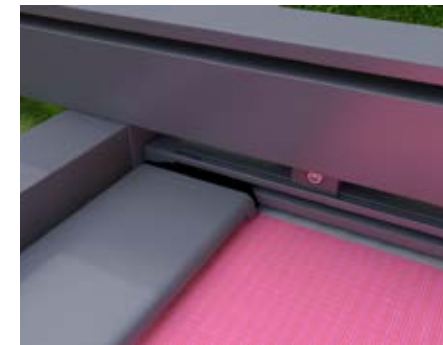

tracfix system

For secure, lateral cover guidance and a gap-free, closed look (optional).



Covers recommended by markilux

Special roof festoon covers, colour-fast, anti-static, permeable to air and flame-retardant.

Operation

By cord pulley system.
Optionally, up to a width of 100 cm
by operating rod.

Dimensions

A maximum width of 400 cm is available up to
an extension of 422 cm, a maximum extension
of 610 cm up to a width of 200 cm.

Customisation options

For intelligent control systems and the full
range of colours and optional accessories,
please refer to page 40.


markilux roof festoon

In summer: cool. Turn a conservatory into a living room: The roof festoon, which is installed below the glass, creates a pleasantly light and an airy atmosphere. Special covers – light-fast, anti-static, permeable to air and flame-retardant – run on tensioned, stainless steel wires and create pleasant shade in the summer and retain heat in the winter.

In winter: warm.

Environment: perfect.

Enjoy your conservatory and the homely atmosphere created by the markilux roof festoon.

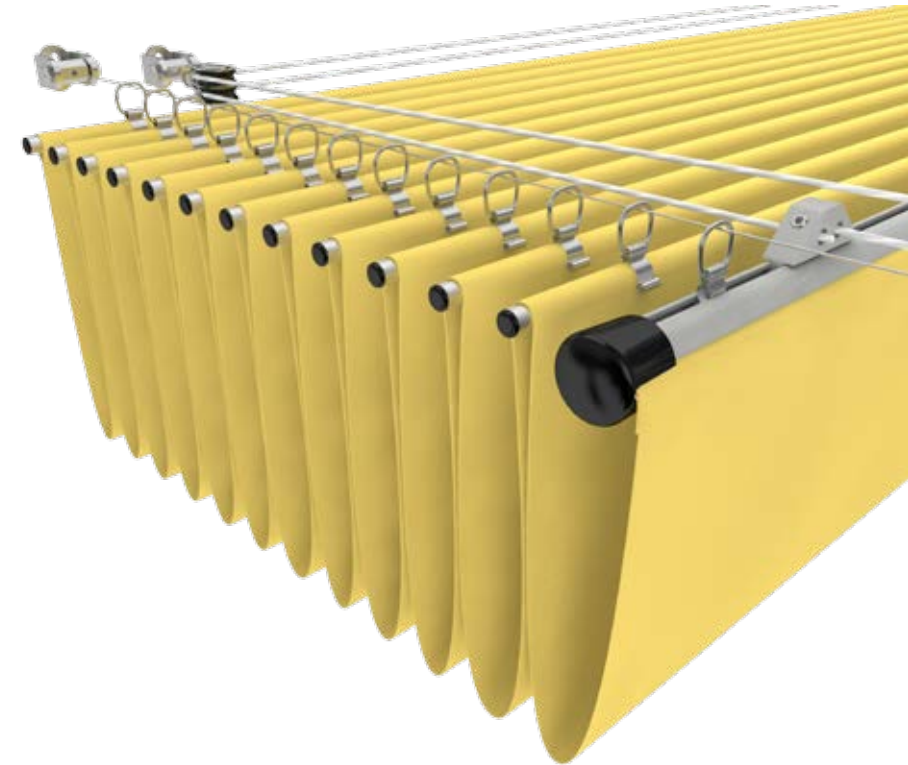

Number of tensioned supporting wires

	Cord pulley system						
Width cm	100*	150	200	250	300	350	400
Tensioned wires	2	3	3	4	4	5	5

* Also available with an operating rod instead of the cord pulley system.

Depth of retracted material

Extension	Depth of retracted material
up to 234 cm	approximately 18 cm
up to 422 cm	approximately 26 cm
up to 610 cm	approximately 38 cm

Intermediate widths and extensions can be supplied.

markilux quality “made in Germany”

Experience and knowledge by tradition. Ideas and creativity for the future.

Safety

Certified quality from a certified company; independent bodies audit us and document our commitment to quality. The uniqueness of our production facility, weaving mill and awning assembly lines in the confines of one company make it possible to create products that leave no wish unfulfilled.

Innovation

markilux awnings did not get to where they are by chance. In each of our products you will find technical innovations crafted for a particular application. We try to anticipate the requirements of tomorrow and satisfy them today.

Dynamics

markilux developments are dynamic. We think well ahead, as markilux clients should be able to enjoy our products for many years to come. Many of the ideas we have can be retro-fitted to already existing products. This makes our products very long-lasting indeed.

Functionality

markilux technology is designed to last for a small eternity. The materials used meet the highest standards so ensuring problem-free operation for many years.

Service

markilux, dedicated to craftsmanship. markilux Specialist Dealers are experts when it comes to the sale and installation of awnings. We support these businesses with our many years of experience, specialist training and know how.

Design

markilux products are designed to be timeless. Trendy and classic lines united in the perfect products for your home. Reputable designers have created beauty in both the technological and the textile.



markilux


markilux awning covers

With the purchase of a markilux awning cover you have chosen a high-class, quality product. It significantly influences the colour ambiance and atmosphere under your awning. For even greater enjoyment of the colour ambiance provided by the shade of an awning, markilux offers an extensive collection of more than 250 cover patterns made from the innovative, high-tech fabrics sunvas snc and sunsilk snc.



Exclusivity at no extra cost – the visutex collection

Eight vibrant colour families and elegant patterns lend these fabrics, which were designed exclusively for markilux, a unique signature.

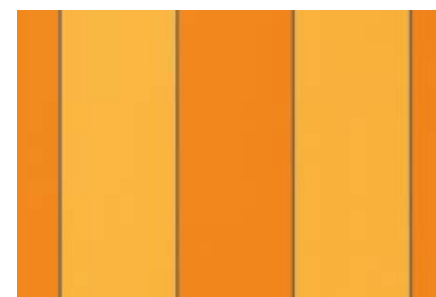


sunsilk snc

A silky, smooth surface, brilliant luminosity.



sunvas snc

Textile touch and appearance, soft luminosity.

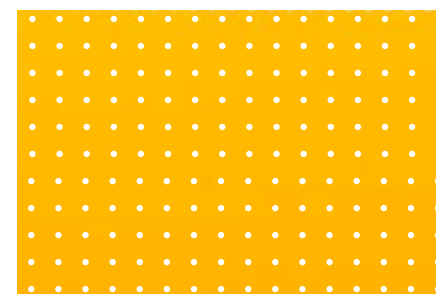

Specials collections

For special applications; Shadeplus, vertical awnings, conservatory awnings, under-glass awnings etc.



markilux signwriting


Awning covers and valances offer an ideal surface for outdoor advertising. The different printing methods available offer individual and almost unlimited design possibilities to display expressive and realistic images even on large cover areas.

markilux


markilux Lounge and standard colours

The Lounge and standard frame colours are available at no extra cost*, depending on the model and, together with the vast range of fabric patterns in the markilux collection, they offer almost endless possibilities of personalising the colour scheme of every awning. RAL colours are also available at a surcharge.

Lounge colours




Off-white textured finish 5233



Stone grey metallic 5215




Anthracite metallic 5204




Havana brown textured finish 5229


Standard colours



Traffic white RAL 9016



Metallic aluminium RAL 9006



Grey brown similar to RAL 8019

* Please refer to pages 48 and 49
Colours similar to those in the RAL range – these may differ slightly from those depicted in both hue and finish.

markilux lighting and infra-red heaters



markilux infra-red heater

Feel the pleasant warmth instantly and make your evening last even longer.

The markilux infra-red heater in a waterproof, powder-coated aluminium housing saves at least 30% in energy compared to standard gas heating systems.

Available of course in your awning colour and with remote control. Optionally with a power output of 1400 Watts or 2000 Watts.



markilux spotline LED

markilux spotline LED with swivelling LED spots in a powder-coated aluminium housing. Using the comfortable hand-held transmitter, the brightness can be dimmed and also the colour temperature adjusted from soft white to daylight white (3000 to 5500 Kelvin). The markilux spotline LED is available in three lengths 120 cm / 2 spotlights, 180 cm / 3 spotlights, and 300 cm / 5 spotlights.

Also available as markilux spotline with halogen spots in a length of 200 cm with 3 spotlights and 300 cm with 5 spotlights, each with a power output of 20 Watts.

markilux hotspot

Warmth and light in stylish combination.

With 4 halogen spots (20 Watts each) and 2 infra-red heaters (1400 Watts each), the markilux hotspot ensures a pleasant and enjoyable atmosphere. Warmth until late at night. Length 300 cm. Other lengths from 200 cm up to 400 cm on request.



markilux

markilux panorama window


for the markilux 869 tracfix



Enjoy the outdoors for even longer. The markilux 869 with panorama window – the see-through vertical blind.

Whether you are seated or standing – a matching combination of fabric and a transparent panorama window provides a clear view outside and shelter from wind and rain.

Maximum width 400 cm, maximum height 300 cm.
Other variations on request.

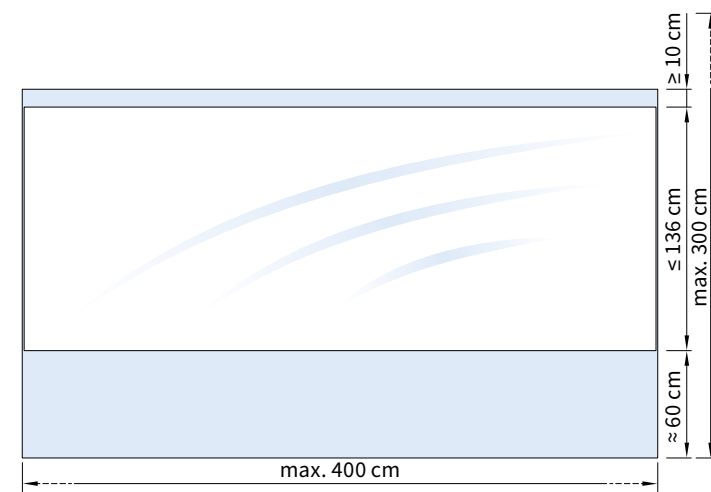

The material used for the panoramic window is a UV-resistant material made of clear PVC. The blind may only be used when the ambient temperature is between + 5°C and + 35°C. The foil material used may become cloudy over time.

markilux operating ease

Our intelligent extras have only one purpose: to make your time under the markilux awning as comfortable and secure as possible. Talk to your local markilux specialist dealer about the individual possibilities.



Radio-controlled motors and remote operation

With a radio-controlled motor your markilux will react at the press of a button. The ergonomically shaped and elegantly designed markilux remote control complements this feature perfectly.



Light and wind sensor (rain sensor optional)

The intelligent, automatic weather station: you can lean back – your markilux reacts to any and every change in the weather. The automatic sensors extend the awning when the sun comes out and retract it when the wind is too strong.



Sunis – solar-powered sunlight sensor

The sensor Sunis RTS makes your blind or awning react to sunlight and can be mounted on any wall.

It sends out a signal to extend or retract any blind or awning fitted with a radio-controlled motor without needing to be wired to the mains. Built-in solar cells ensure a reliable power supply.

710/810 720/820 725/825 750/850 760/860 869 869 tracfix 620 tracfix 660 tracfix 730/830




Maximum dimensions single unit (width × projection)	500 × 350 cm	300 × 350 cm	300 × 350 cm	500 × 350 cm	400 × 250 cm 325 × 400 cm	600 × 350 cm 400 × 600 cm	600 × 350 cm 550 × 400 cm	300 × 300 cm	300 × 300 cm	700 cm width different arm lengths possible
coupled unit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	—	—	—	—	—	<input type="checkbox"/>
Lounge and standard colours										
traffic white, RAL 9016	●	●	●	●	●	●	●	●	●	●
metallic aluminium, RAL 9006	●	●	●	●	●	●	●	●	●	●
anthracite metallic, 5204	○	○	○	○	○	○	○	○	○	○
grey brown – similar to RAL 8019	●	●	●	●	●	●	●	●	●	●
Optional accessories										
hard-wired motor	○	○	○	○	○	○	●	●	●	○
radio-controlled motor with remote control	○	○	○	○	○	○	○	○	○	○
manual gearbox operation	●	●	●	●	●	●	—	—	—	●
interior operation	○	○	—	○	—	—	—	—	—	○
Installation										
face fixture	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	●	<input type="checkbox"/>
soffit fixture	<input type="checkbox"/>	—	—	<input type="checkbox"/>	—	—	—	—	—	<input type="checkbox"/>
reveal fixture	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
stand-off installation	—	—	●	—	●	●	●	—	<input type="checkbox"/>	—
above glass	—	—	—	—	—	—	—	—	—	—
under glass	—	—	—	—	—	—	—	—	—	—
Guide system										
guide rails / tracks	—	●	●	—	●	●	●	●	●	—
stainless steel wire	●	—	—	—	—	—	—	—	—	—
stainless steel guide rods	—	—	—	●	—	—	—	—	—	—
gas piston mechanism	—	—	—	—	—	—	—	—	—	●
							panorama window optional	flyscreen optional	flyscreen optional	
Special technical features	—	—	—	—	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	—	tensioning system pre-assembled	accro bars at a surcharge


Optional for all awnings with hard-wired motor/
remote-controlled motor
Light and wind sensor


Special colours
available at a surcharge for all markilux
models incl. the markilux Lounge colours

Marquisolettes			Triangular Awning			Conservatory and Under-glass Awnings							
740/840	745/845	893	780/880	889	889 tracfix	8800	8800 tracfix	8850	Roof Festoon				
300 × 300 cm	300 × 300 cm	400 × 500 cm	400 × 250 cm 325 × 400 cm	600 × 450 cm 350 × 600 cm	600 × 400 cm	700 × 450 cm 500 × 700 cm	600 × 450 cm 500 × 600 cm	650 × 400 cm 500 × 500 cm	400 × 422 cm 200 × 610 cm			Maximum dimensions single unit (width x projection)	
<input type="checkbox"/>	<input type="checkbox"/>	—	—	—	—	<input type="checkbox"/>	<input type="checkbox"/>	—	—			coupled unit	
<input type="checkbox"/>	<input type="checkbox"/>	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			Lounge and standard colours	
●	●	●	●	●	●	●	●	●	●			traffic white, RAL 9016	
●	●	●	●	●	●	●	●	●	●			metallic aluminium, RAL 9006	
○	○	○	○	○	○	●	●	●	—			anthracite metallic, 5204	
●	●	●	●	●	●	●	●	●	●			grey brown – similar to RAL 8019	
<input type="checkbox"/>	<input type="checkbox"/>	—	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			Optional accessories	
○	○	●	○	○	●	●	●	●	—			hard-wired motor	
○	○	○	○	○	○	○	○	○	—			radio-controlled motor with remote control	
●	●	—	●	●	—	—	—	—	—			manual gearbox operation	
○	—	—	—	—	—	—	—	—	—			interior operation	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			Installation	
—	—	—	—	—	—	—	—	—	—			face fixture	
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			soffit fixture	
—	●	●	—	—	—	—	—	—	—			reveal fixture	
—	—	—	<input type="checkbox"/>	—	—	●	●	●	—			stand-off installation	
—	—	—	<input type="checkbox"/>	●	●	—	—	—	—			above glass	
—	—	—	<input type="checkbox"/>	●	●	—	—	—	—			under glass	
●	●	●	●	●	●	●	●	●	—			Guide system	
—	—	—	—	—	—	—	—	—	●			guide rails / tracks	
—	—	—	—	—	—	—	—	—	—			stainless steel wire	
●	●	●	—	—	—	—	—	—	—			stainless steel guide rods	
—	—	—	—	—	—	—	—	—	—			gas piston mechanism	
wind-lock mechanism	wind-lock mechanism	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	tensioning system pre-assembled	cord pulley or operating rod		Special technical features	

● supplied as standard ○ optional (surcharge applies) □ possible — not possible

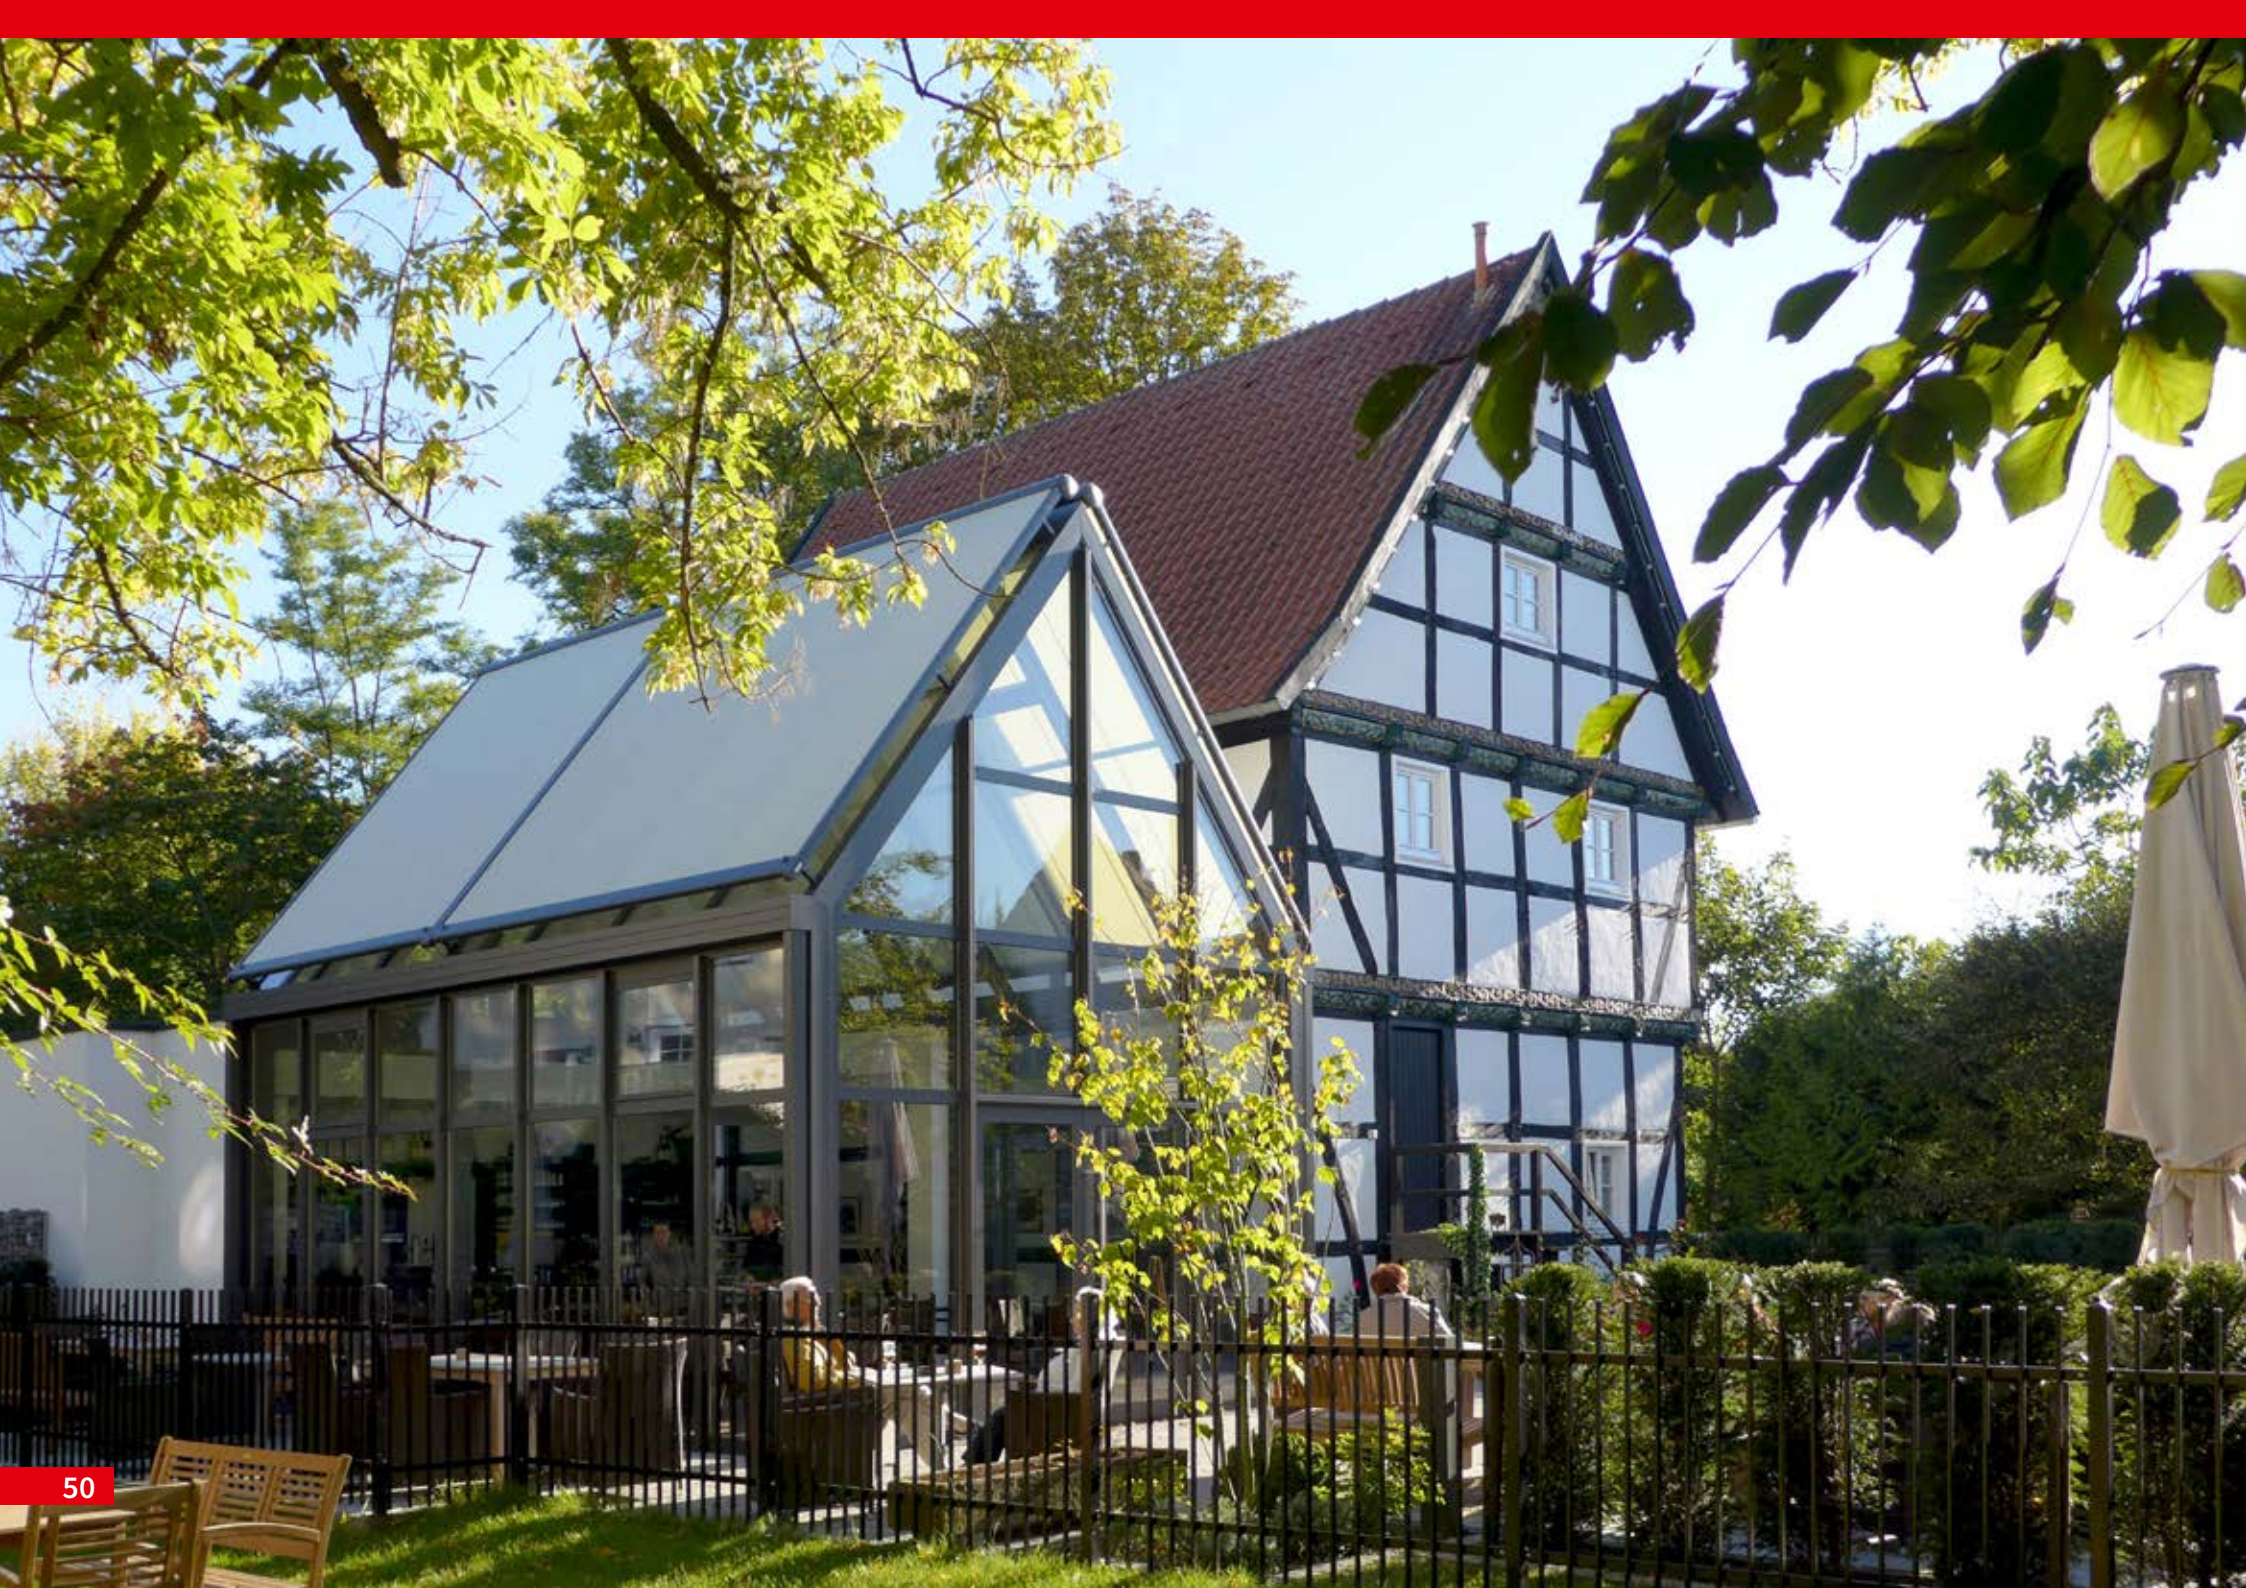

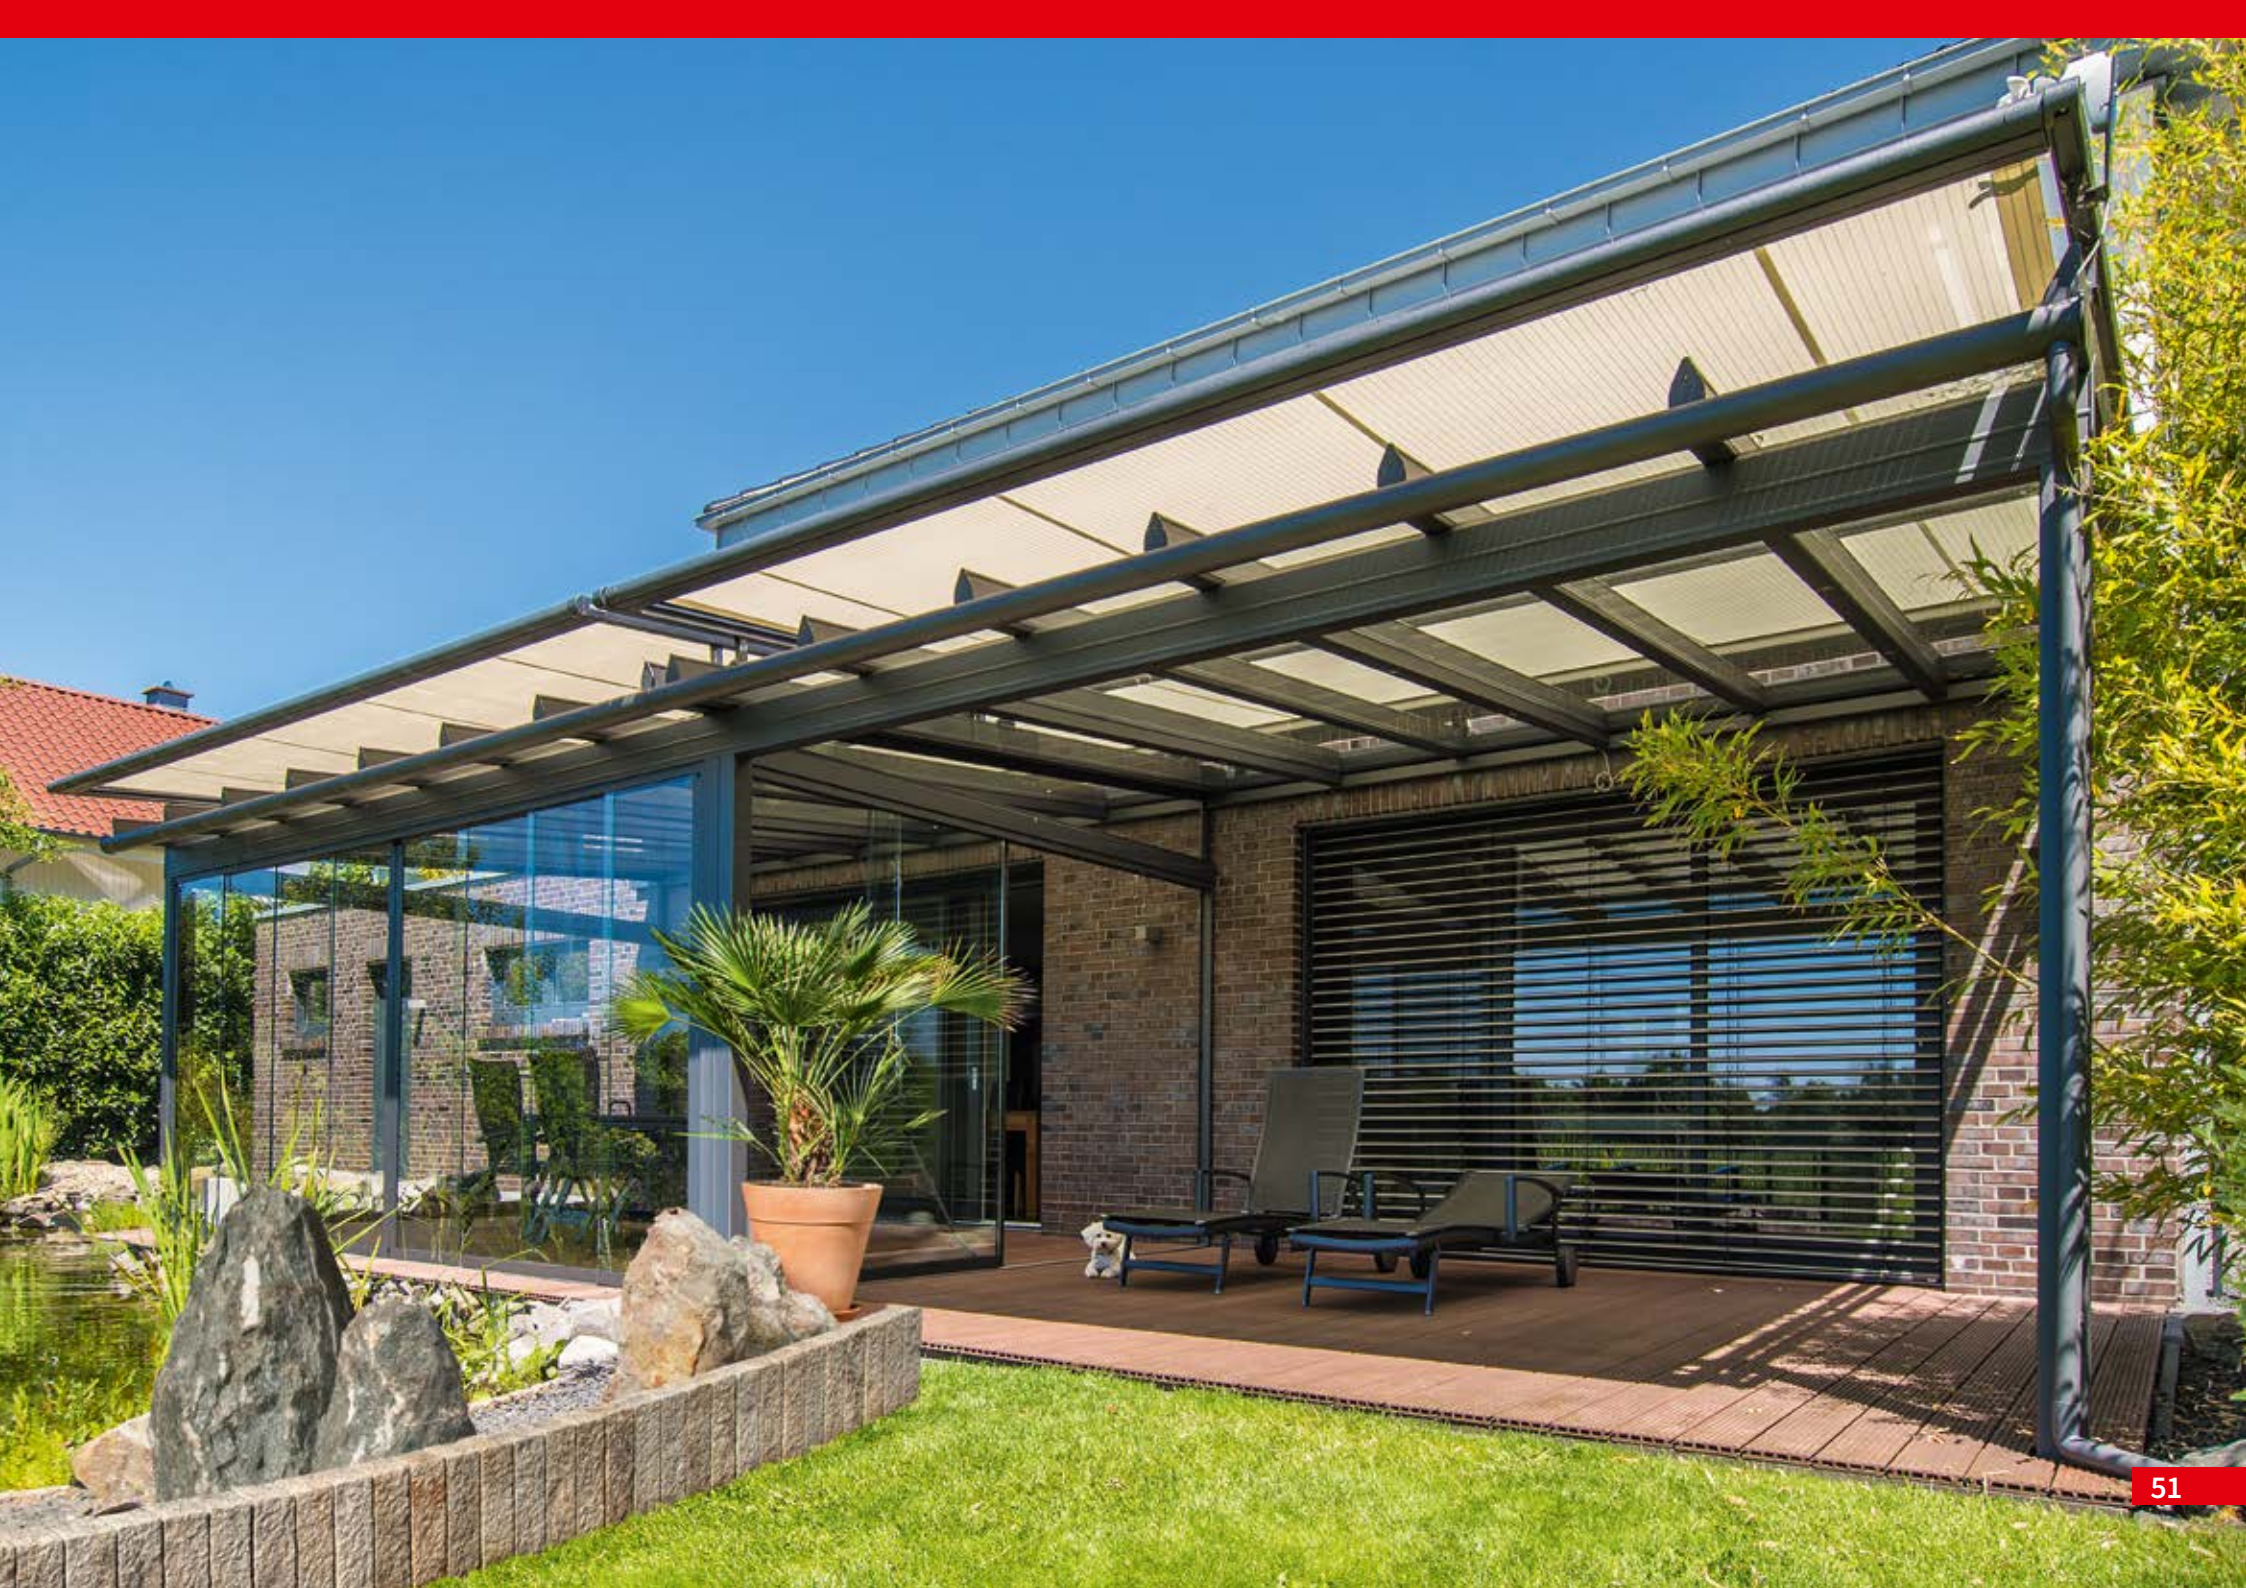

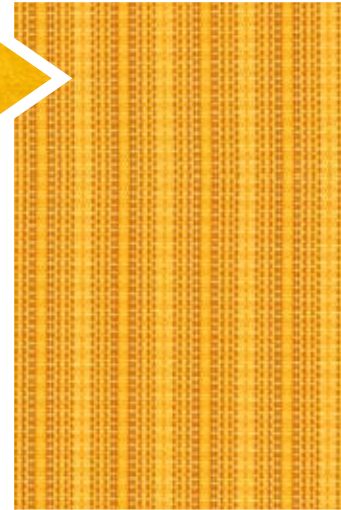

Please do not hesitate to contact us if you require assistance or advice:

markilux awning covers

For even greater enjoyment of the colour ambiance provided by the shade of your awning, markilux offers an extensive collection of more than 250 fabric patterns.

markilux