



Vertical cassette blind

markilux 776 / 776 tracfix

The perfect sun protection solution which also maintains your privacy – the tensioned vertical cassette blind that can shade large surface areas.



reddot design award
winner 2017



GERMAN
DESIGN
AWARD
WINNER
2018

[markilux.com](https://www.markilux.com)

markilux
safe timeless beautiful

Product characteristics

Wind resistance class 2 | 3 (depending on size)

Beaufort 5 → 28–37 km/h → 7.5–10.4 m/s → 17–23 mph

Beaufort 6 → 38–48 km/h → 10.5–13.4 m/s → 24–30 mph


side view, motor driven, flat track brackets

side view, manual operation, flat track brackets




tracfix cover guidance - no gap between cover and track ¹⁾
track bracket 80 mm

reveal fixture with angled bracket (fixture type 15)

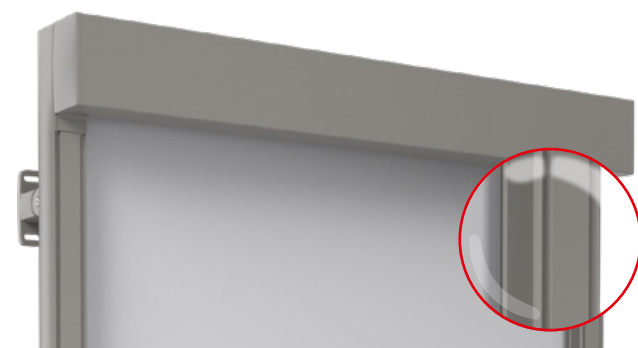



front profile finishes flush with the end of the guide tracks

fitted to a round markilux syncra post
as seen from inside

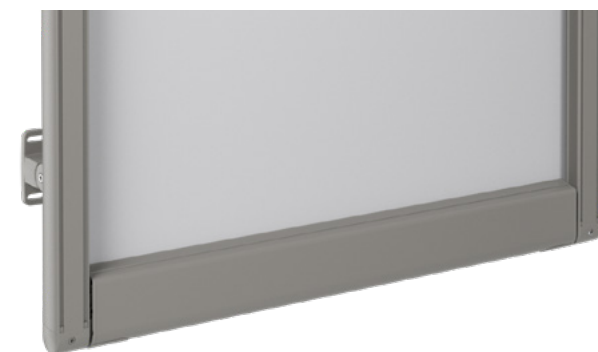

fitted to a round markilux syncra post viewed from inside

fitted to a square post of the markilux construct

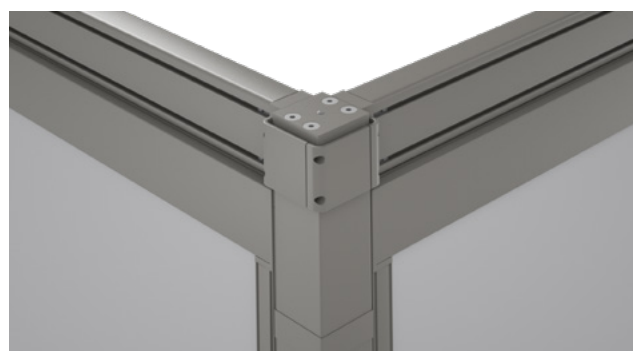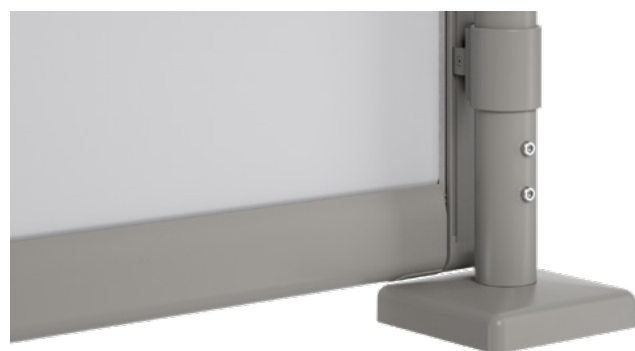

1) optional configuration

Product characteristics

Description

- vertical cassette blind with angular design characteristics. The ingenious tensioning system and robust construction mean that areas of up to 24 m² can be shaded.

Special features

- fully encompassing cassette that protects the cover perfectly
- the tried and tested tensioning system – with drive belts and integrated gas pistons – delivers optimum cover tension in any phase of extension
- tracfix optional: the continuous lateral cover guidance system that leaves no gap between the cover and guide tracks – gives improved wind stability and a cleaner appearance
- panorama window optional, the transparent window made of a special foil that makes a perfect view both in and out possible - for both private and commercial applications
- the broad range of brackets with patented clip-on system offers individual fixture solutions, from discrete to conspicuous
- can be combined perfectly with other markilux awning systems

Dimensions

- single unit: 60–600 cm in width, maximum unit height 600 cm (depending on the width)
- maximum dimensions, width × unit height: 400 × 600 cm / 500 × 450 cm / 550 × 400 cm / 600 × 350 cm (without tracfix)
- maximum dimensions, width × unit height: 550 × 400 cm / 600 × 350 cm (with tracfix)
- intermediate sizes are available

Roller tube and lateral bearings

- round roller tube Ø 85 mm with keyway, galvanised steel – excellent stability ensures near perfect cover performance even at the largest widths
- the roller tube bearing is made of stainless steel

Awning profiles

- extruded aluminium, in façade quality, powder coated
- cassette profile in two pieces, square, 125 mm × 125 mm
- guide tracks angular, rounded edges, width × height 52 mm × 52 mm
- front profile rounded on the underside, smooth appearance, height × depth 110 mm × 52 mm

Side caps

- the cassette end caps are made of die-cast aluminium, in two parts, powder coated
- the front profile end caps are made of high-quality plastic, powder coated

Fixture brackets

- extruded aluminium, powder coated
- self-supporting cassette attached to the top of the angled guide rails
- brackets for the guide tracks: face fixture, reveal fixture, post fixture (posts of the markilux pergola with fixed posts / markilux syncra / markilux construct)
- standard bracket heights: 20 mm / 85 mm / 105 mm / 145 mm (bespoke heights can be ordered)


Frame colours

markilux frame colours without surcharge

traffic white RAL 9016

metallic aluminium RAL 9006


grey brown, similar to RAL 8019

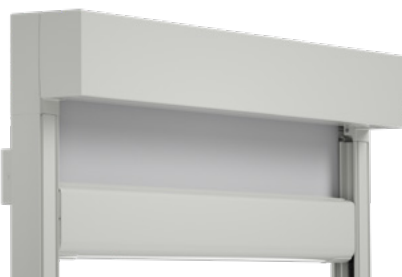

off-white textured finish, 5233 ¹⁾

stone grey metallic, 5215 ¹⁾

anthracite metallic, 5204 ¹⁾

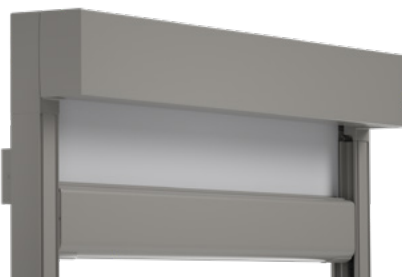

Havana brown textured finish, 5229 ¹⁾



Non-standard powder-coated finish

Bespoke frame colours at a surcharge – matt, metallic and pearl finishes as well as other colour ranges (DB, Tiger etc.) on request. All frame colours are available at a surcharge with enhanced corrosion protection.

¹⁾ textured finish


Colours may differ slightly from those depicted in both hue and finish.

Dimensions and configuration options

Single unit

		Blind fixture width										Minimum fixture width	
		150	200	250	300	350	400	450	500	550	600	Hard-wired motor	Radio-contr. motor
Order dimensions		60 150	151 200	201 250	251 300	301 350	351 400	401 450	451 500	501 550	551 600		
Overall width		+ 5.4											
AH	150 ¹⁾											60 / 72 ¹⁾	70 / 82 ¹⁾
	200 ¹⁾												
	250 ¹⁾										2)		
	300 ¹⁾								2)	2)	2)	107 ³⁾	107 ³⁾
	350 ¹⁾						2)	2)	2)	2)	2)		
	400 ¹⁾	2)	2)	2)	2)	2)	2)	2)	2)	2)	—		
	450	2)	2)	2)	2)	2)	2)	2)	2)	—	—		
	500	2)	2)	2)	2)	2)	2)	—	—	—	—		
	550	2)	2)	2)	2)	2)	2)	—	—	—	—		
	600	2)	2)	2)	2)	2)	2)	—	—	—	—		

- 1) = tracfix (optional). Only available with motor drive
 2) = wind resistance class 2, all other sizes meet wind resistance class 3
 3) = from a unit height of 281 cm
 AH = unit height



dimensions in cm

Operation

	standard	optional
crank handle	✓ ¹⁾	—
crank handle, operation from the rear	—	—
crank handle, operation from inside the building	—	—
hard-wired motor	✓ ²⁾	✓
radio-controlled motor io, 868 MHz	—	✓
radio-controlled motor RTS, 433 MHz	—	✓

- 1) not available in tracfix units
 2) in tracfix units

Coupled blind

not available

Optional accessories

tracfix – the cover is held in the guide tracks by a zip
flexible panorama window, only in tracfix units
automatic controls (light, wind, rain)

N.B! Important background information can be found in the chapter "Optional Accessories".

Awning cover	fabric range no.	standard	optional	blind fixture width	unit height	cover manufacture
sunvas	301.. / 309..-315..	✓	—		≤ 450	LN
					≤ 400	LN
sunsilk	324.. / 325.. / 328.. / 369..	✓	—		≤ 450	LN
					≤ 400	LN
sunvas (250 cm)	31008, -09, -13, -16, -18, -25, -27, -28, -31, -36, -37, -57, -58, 31109, -14, -17	✓	—	≤ 250		N
				≤ 400	≤ 243	N
				≤ 400	≥ 244	QN
				≤ 320		N
sunvas (320 cm)	31008, -09	✓	—	≤ 400	≤ 313	N
				≤ 400	≥ 314	QN
				≤ 400	≤ 243	N
				≤ 400	≥ 244	QN
transolair	338..	—	✓	≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
				≥ 401 ≤ 550	≤ 400	LN
				≤ 600	≤ 350	LN
transolair (120 cm)	339..	—	✓		≤ 450	LN
					≤ 400	LN
perfortex	331.. / 332..	✓	—		≤ 400	LN
				≤ 550	≤ 400	LN
				≤ 600	≤ 350	LN
				≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
vuscreen Alu	317..	—	✓	≥ 401	≤ 250	N
				≤ 400	≤ 243	N
				≤ 400	≥ 244 ≤ 400	QN
				≥ 401	≤ 250	N
Fibreglass Screen Fabrics	272..	—	✓		≤ 249	N
					≥ 250 ≤ 400	QN
				≤ 185	≤ 400	N
				≤ 400	≤ 194	N
Soltis Perform 92	92-20..	—	✓	≥ 186 ≤ 400	≥ 195 ≤ 400	QN
				≤ 185	≤ 400	N
				≤ 400	≤ 194	N
				≥ 186 ≤ 400	≥ 195 ≤ 400	QN
perla	370..	—	—			
perla FR	374.. / 375..	—	—			

dimensions in cm


 = tracfix

N = seamless



LN = vertical seam(s), panel width usually 120 cm

QN = horizontal seam(s)


Fixtures, fittings and accessories




flat track bracket

78548.double track bracket
flat**73627.**angled bracket for
bearing /
motor side


50 × 50 × 8 × 80 mm

78719.track bracket
with adjustable head


80 mm

73624.double track bracket
with adjustable head


80 mm

73631.universal
track bracket


80 mm

73629.track bracket
with adjustable head


100 mm

76046.double track bracket
with adjustable head


100 mm

73634.universal
track bracket


100 mm

76054.track bracket
with adjustable head



140 mm

76048.double track bracket
with adjustable head

140 mm

73636.universal
track bracket

140–500 mm


76053.decorative cap for square
track bracketsstandard accessory for
bracket**2 × 76718.**

bolt reduction assembly

M10 → M6 / SW 13

30 mm length

pack 10 pcs

8440381

stand-off fixing tube

30 × 10 × 1000 mm

N.B! max. stand-off
distance 120 mm**701668**

Fixture types

03

10

clearance 20 mm


78548.

20

15by angled bracket
to the side

78548.

78719.

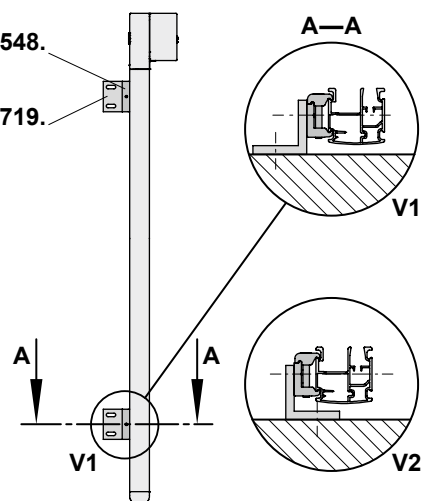**20**

clearance 85 mm

73624.

85

21

clearance 105 mm

76046.

105

22

clearance 145 mm

76048.

145

Individual choice of brackets:


see "Fixtures, fittings and accessories".

When unit height > 300 cm always with 3 brackets per guide track.

dimensions in mm



Fixture types

Dimension overview

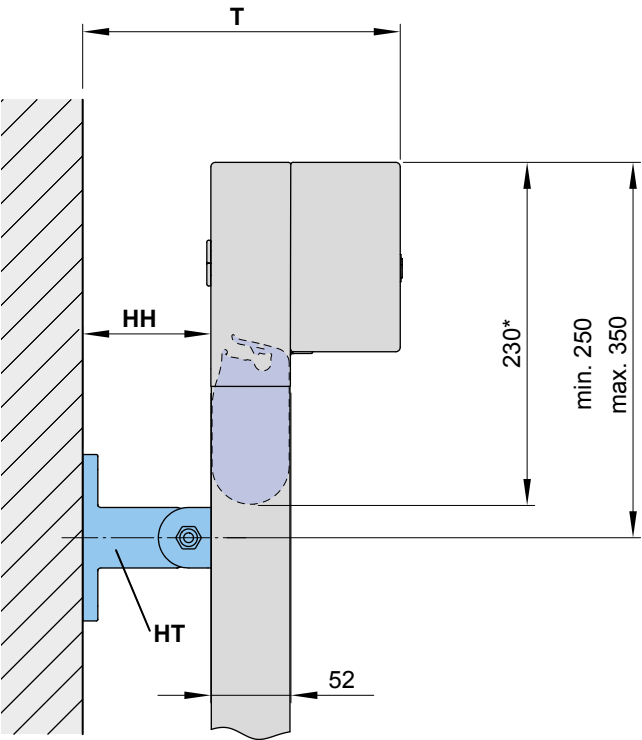

Fixture type 10

Fixture types 20, 21 and 22

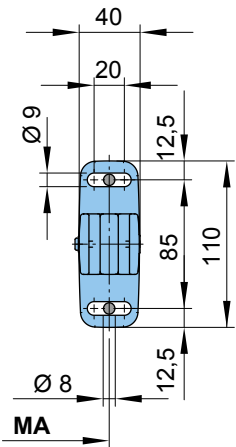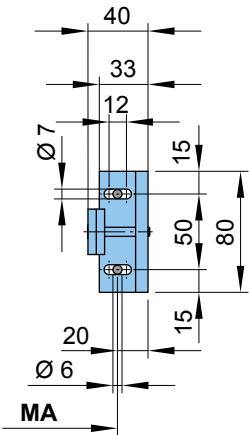


		Fixture type 10	Fixture type 20	Fixture type 21	Fixture type 22
HT	= bracket	78548.	73624.	76046.	76048.
HH	= bracket height	20	85	105	145
T	= overall height	150	215	235	275
MA	= <i>order dimension</i> = blind fixture width = fixture width				
*	= height of cassette including front profile, retracted				


dimensions in mm

Dimension overview

Single unit

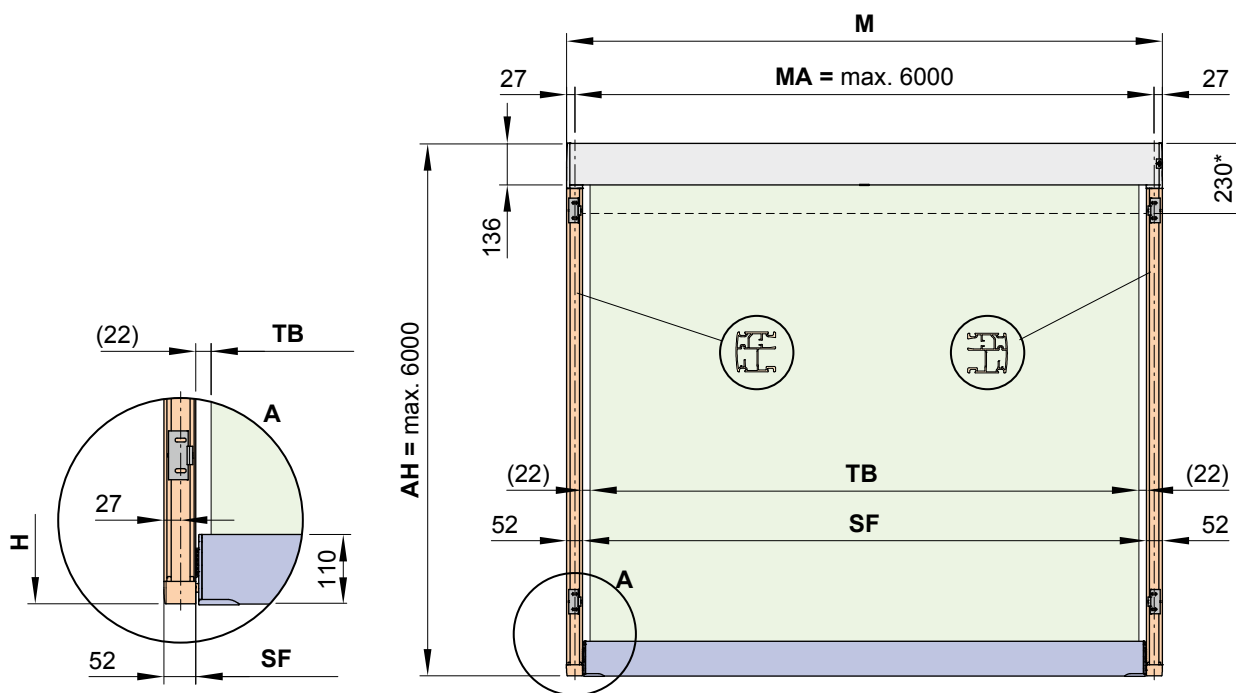

Two single units, fixture via double track brackets

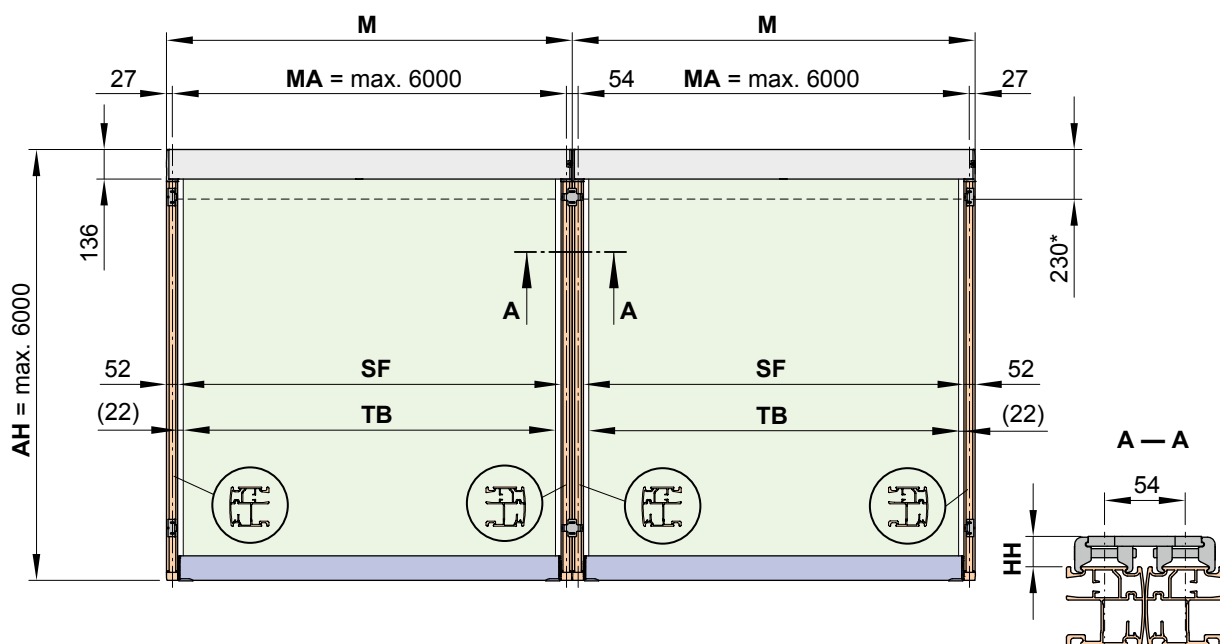


- * = height of cassette including front profile, retracted
- (...) = gap between cover and guide track (non-tracfix units)
- AH = *order dimension* = unit height
- HH = bracket height
- M = overall blind width
- MA = *order dimension* = blind fixture width = fixture width
- SF = visible cover (in tracfix systems)
- TB = cover width


dimensions in mm

Dimension overview

Top window well fixture, motor drive

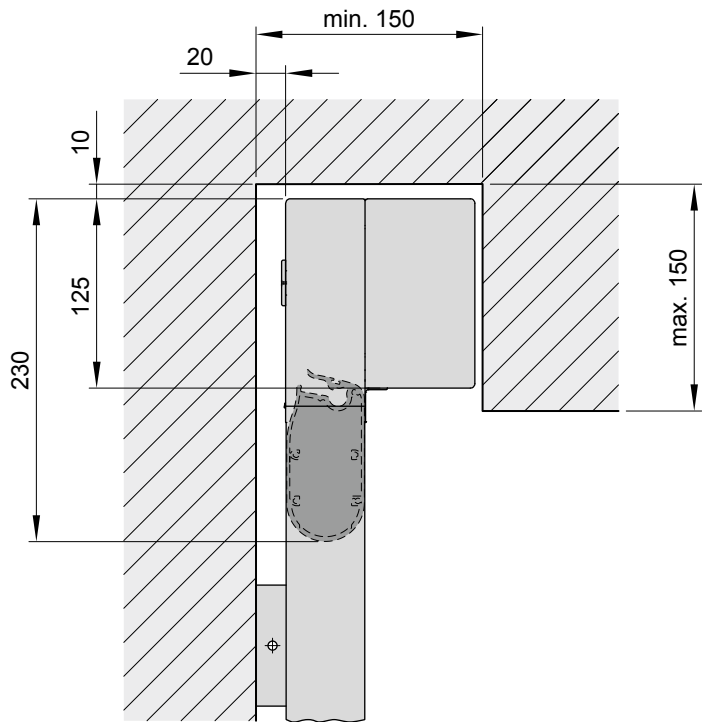







Top window well fixture, manual operation

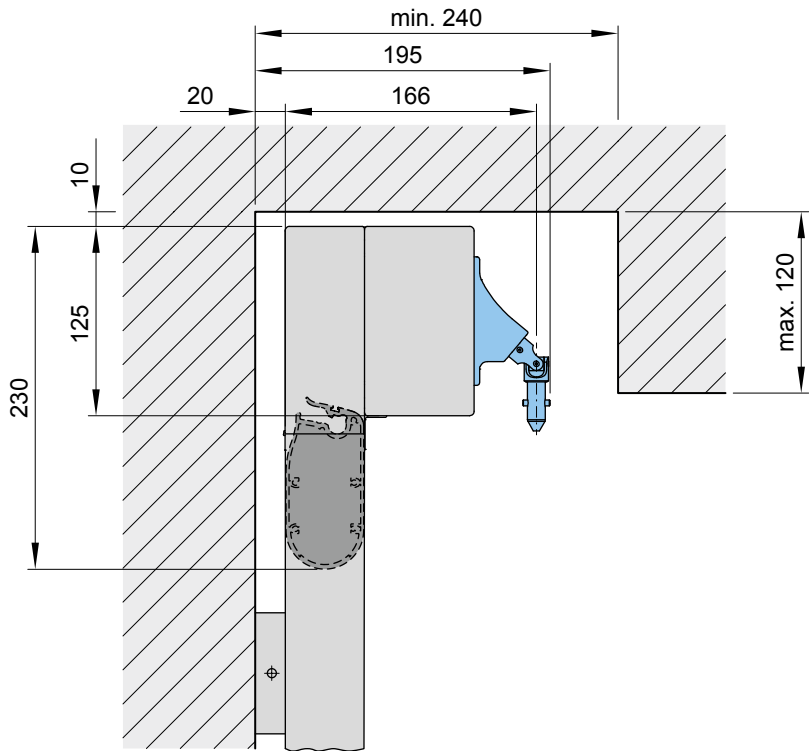


dimensions in mm

Dimension overview fixture types 10, 15

Fixtures, fittings and accessories

 flat track bracket 78548.	 double track bracket flat 2 single units 73627.	 additional angled bracket for the bearing, gearbox and motor sides 50 × 50 × 80 mm 78719.
 accessories for two angled brackets 78719 787211	 bolt reduction assembly M10 → M6 / SW 13 30 mm length pack 10 pcs 8440381	 stand-off fixing tube 30 × 10 × 1000 mm N.B! max. stand-off distance 120 mm 701668

Dimension overview fixture type 10, as seen from inside

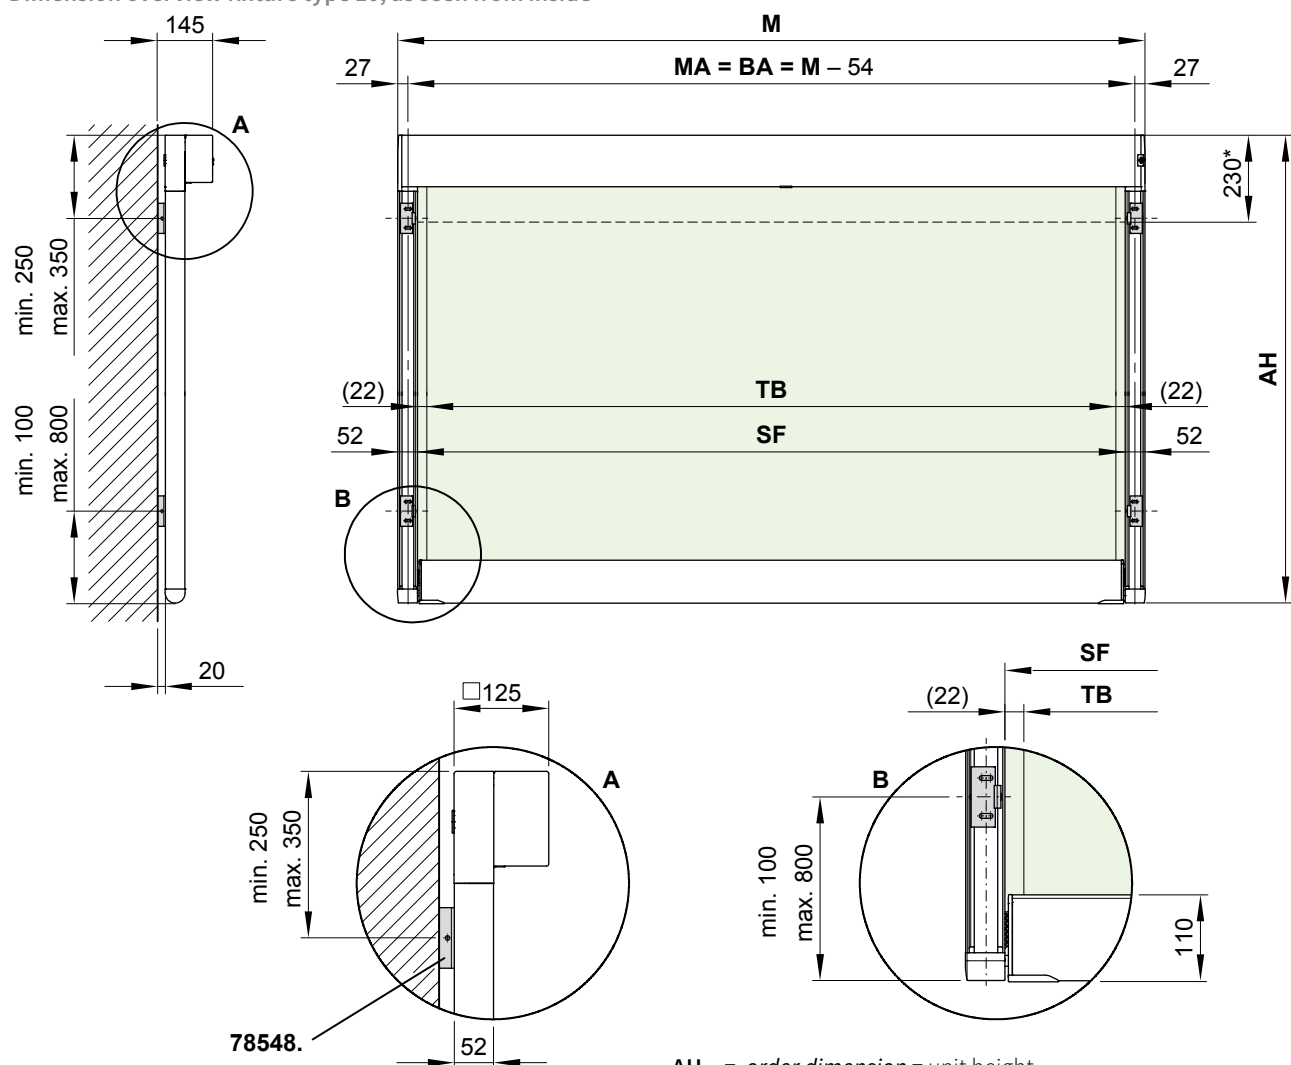

AH = order dimension = unit height

BA = width between fixture points

M = overall blind width = $MA + 54$ mm

MA = order dimension = blind fixture width = fixture width

SF = visible cover area

TB = cover width


dimensions in mm

* = height of cassette including front profile, retracted

(...) = gap between cover and guide track (non-tracfix units)

Dimension overview fixture types 10, 15

Dimension overview fixture type 15, as seen from inside



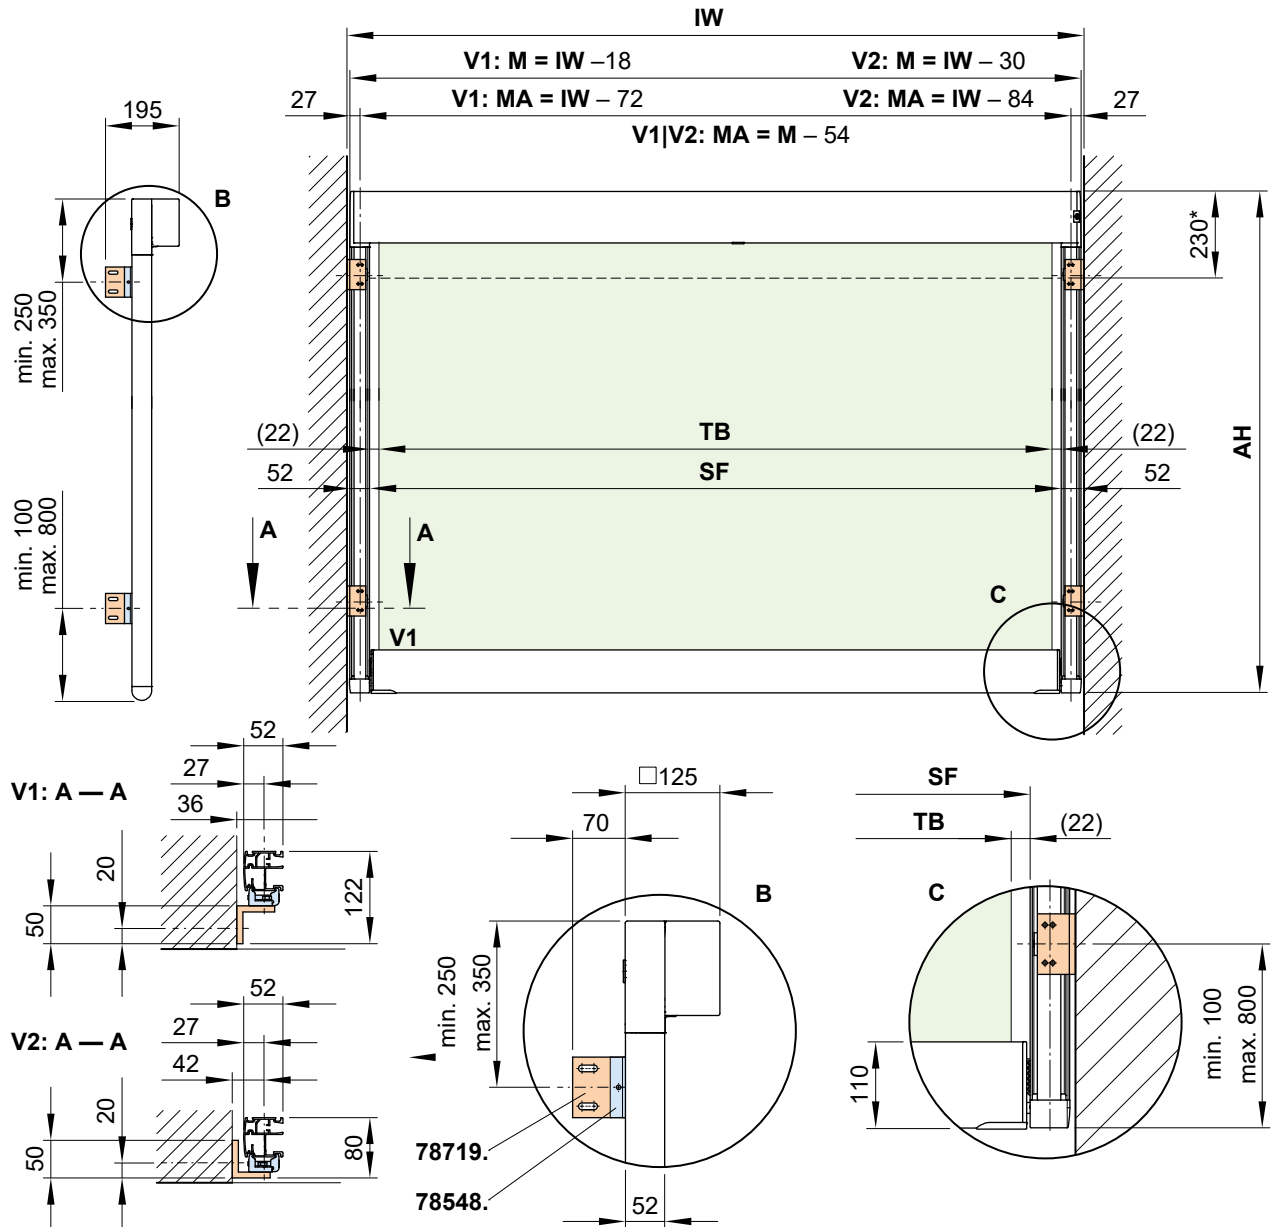


- *** = height of cassette including front profile, retracted
- (...)** = gap between cover and guide track (non-tracfix units)
- AH** = *order dimension* = unit height
- IW** = reveal width
- M** = overall blind width = MA + 54 mm
- MA** = *order dimension* = blind fixture width = fixture width
- SF** = visible cover area
- V1, V2** = variants 1 and 2




dimensions in mm


Fixtures, fittings and accessories – fixture types 20, 21, 22

Fixtures, fittings and accessories – fixture type 20



	track bracket with adjustable head 80 mm		double track bracket with adjustable head 80 mm		universal track bracket 80 mm
73624.		73631.		73629.	

Fixtures, fittings and accessories – fixture type 21



	track bracket with adjustable head 100 mm		double track bracket with adjustable head 100 mm		universal track bracket 100 mm
76046.		73634.		76054.	

	track bracket with adapter plate				
76199.					

Fixtures, fittings and accessories – fixture type 22


	track bracket with adjustable head 140 mm		double track bracket with adjustable head 140 mm
76048.		73636.	

accessories

	bolt reduction assembly M10 → M6 / SW 13 30 mm length pack 10 pcs		stand-off fixing tube 30 × 10 × 1000 mm N.B! max. stand-off distance 120 mm
8440381		701668	

dimensions in mm


Overview of dimensions, fixture types 20, 21, 22

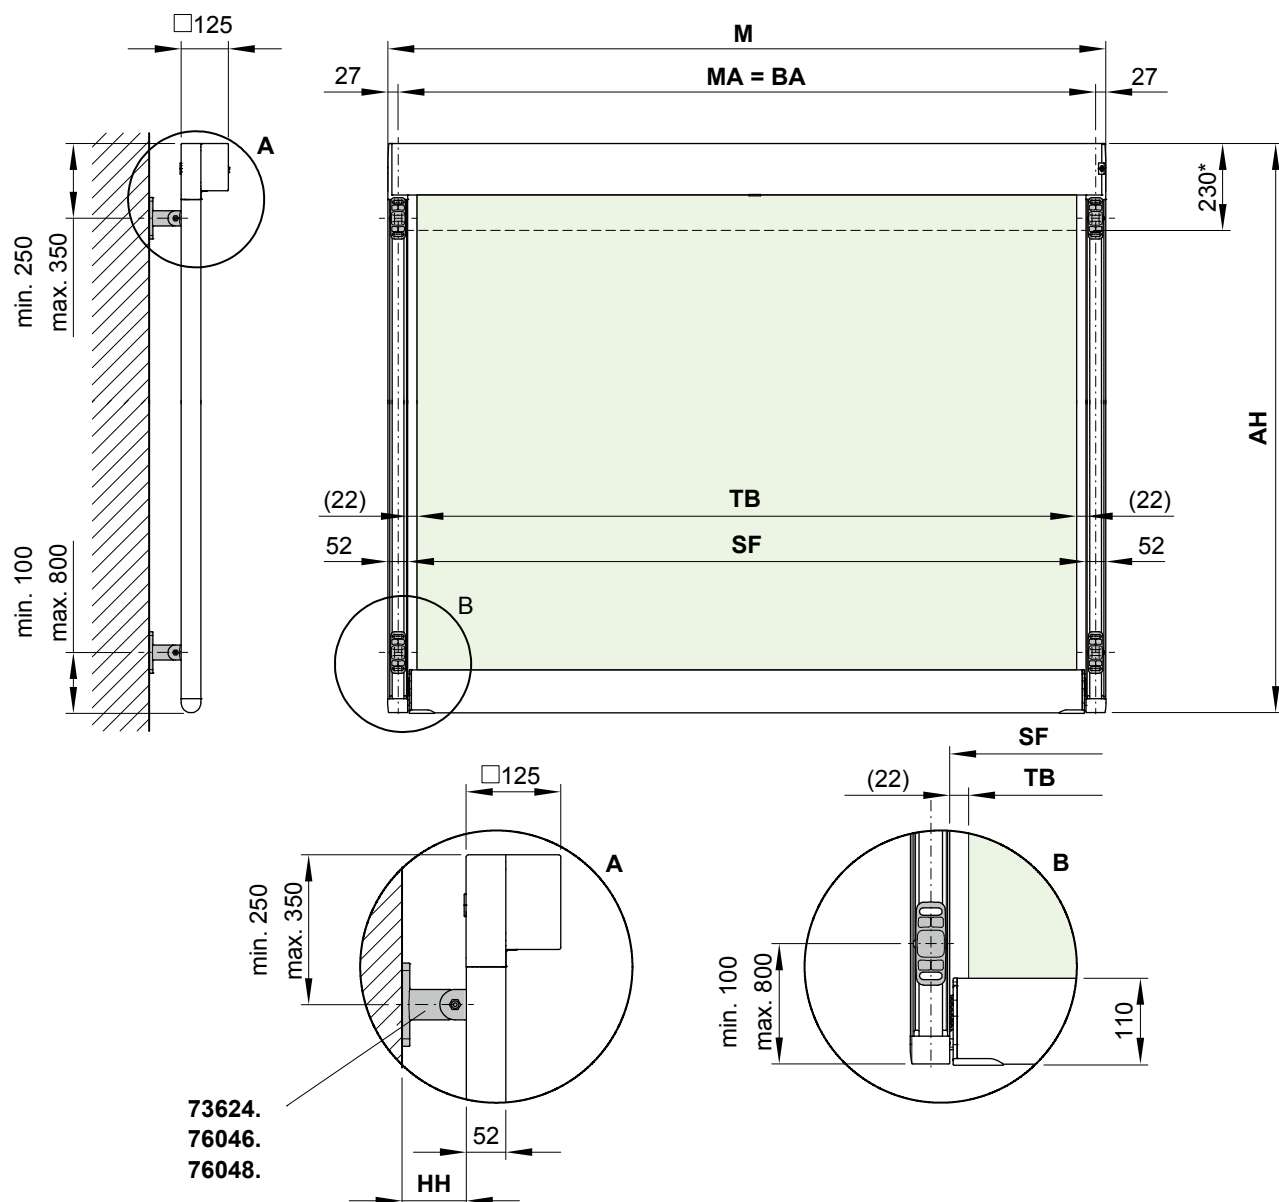

- * = height of cassette including front profile, retracted
- (...) = gap between cover and guide track (non-tracfix units)
- AH** = *order dimension* = unit height
- BA** = width between fixture points
- HH** = bracket height
- M** = overall blind width
- MA** = *order dimension* = blind fixture width = fixture width
- SF** = visible cover (in tracfix systems)
- TB** = cover width

dimensions in mm






Dimensions, fixture to the posts of the markilux pergola with fixed posts



post fixture
guide track

single and double
brackets pergola with
fixed posts – round

72203.

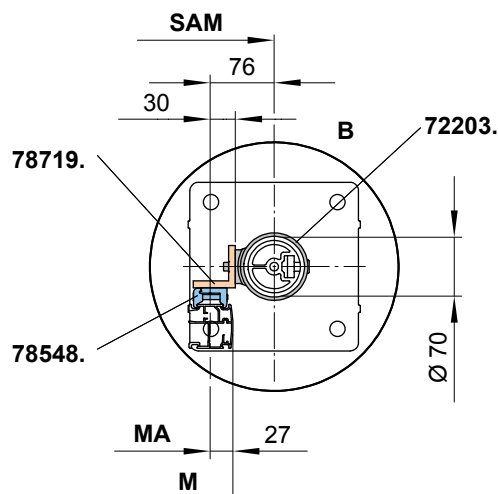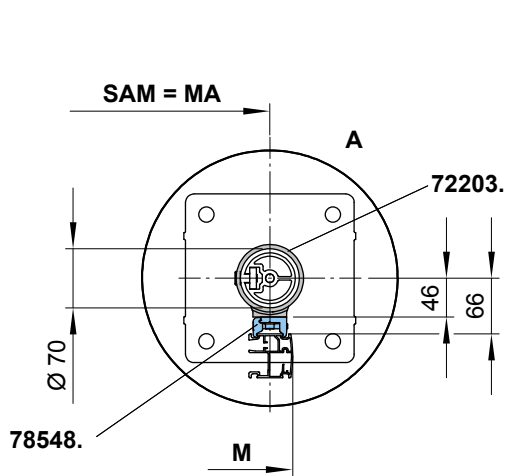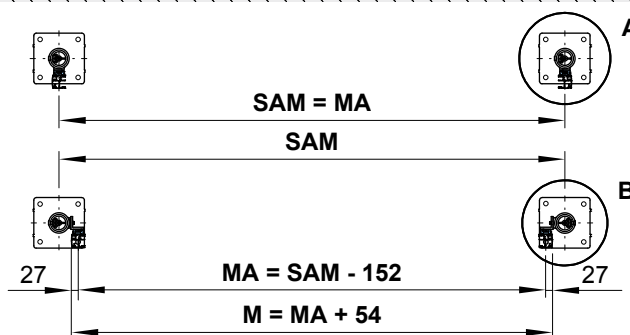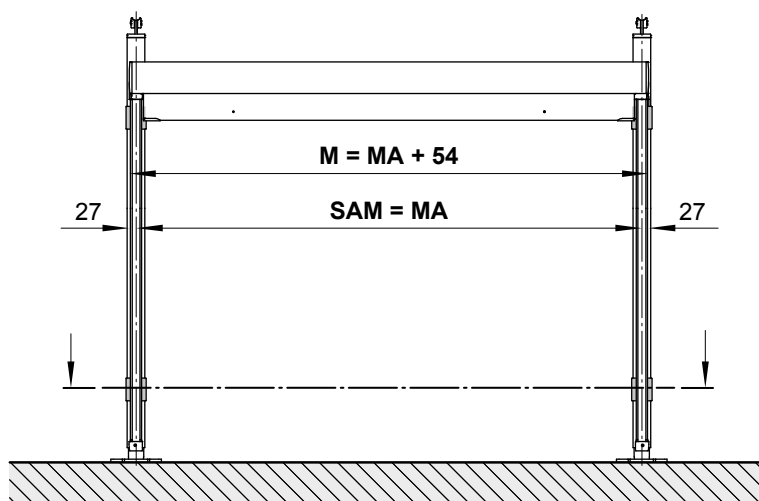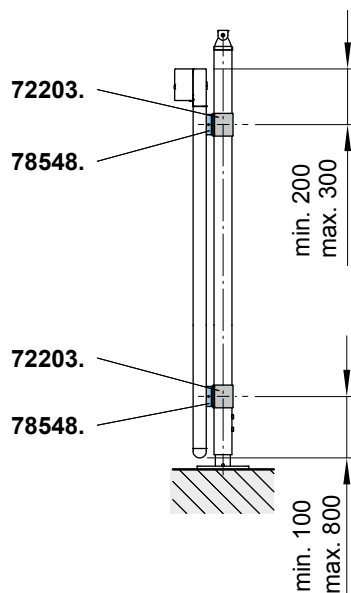


- A = detailed drawing fixture type 10
- B = detailed drawing fixture type 15
- M = overall blind width = $MA + 54$ mm
- MA = *order dimension* = blind fixture width = fixture width
- SAM = post separation centre to centre

dimensions in mm

Dimension overview in combination with the markilux syncra / construct

Fixture to a round post




post fixture
guide track

centre, both sides

round post

79557.




post fixture
guide track

corner, both sides

round post

79556.




post fixture
guide track

corner, one side

round post

79558.





post fixture
guide track

single and double bracket

round post

72206.

Please note: When fixing to the markilux syncra / markilux construct only 2 brackets per track are needed!

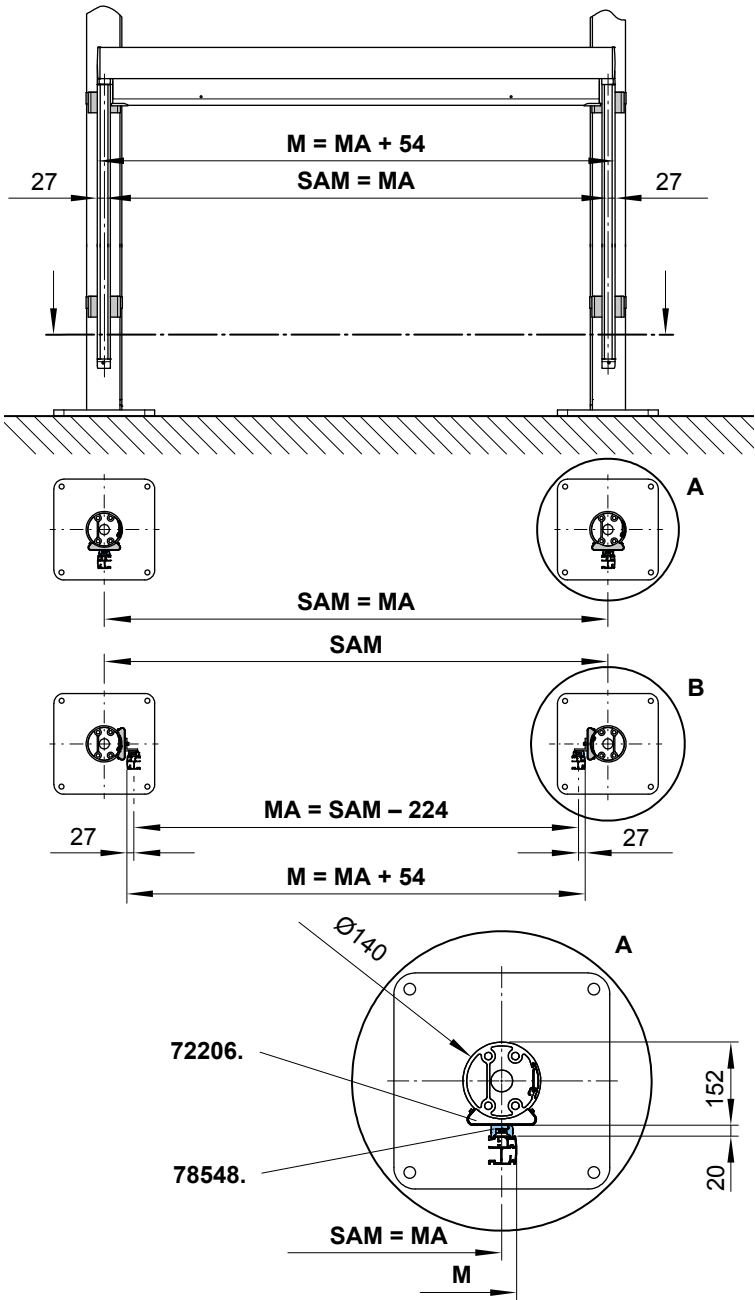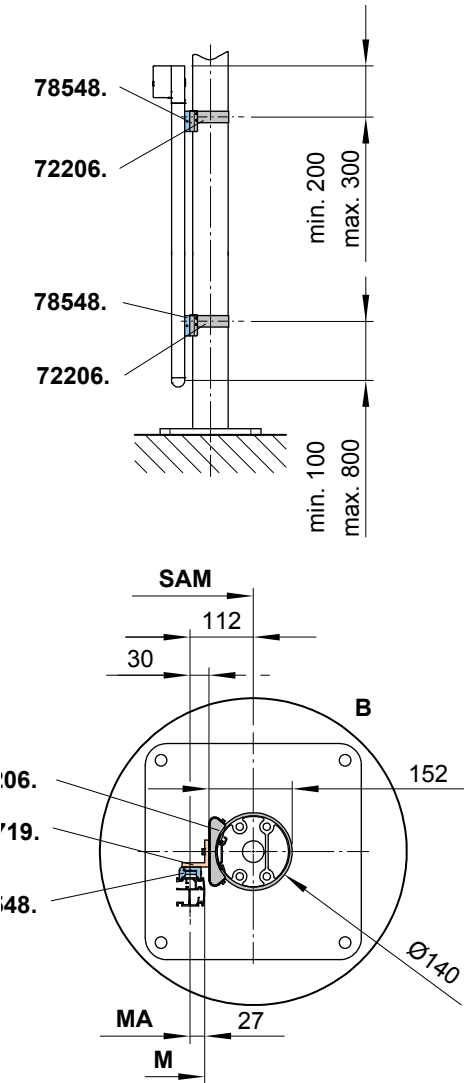


- A = detailed drawing fixture type 10
- B = detailed drawing fixture type 15
- M = overall blind width = MA + 54 mm
- MA = *order dimension* = blind fixture width = fixture width
- SAM = post separation centre to centre

dimensions in mm


Dimension overview in combination with the markilux syncra / construct

Fixture to a square post




post fixture
guide track
centre, both sides
square post

72234.




post fixture
guide track
corner, both sides
square post

72233.



post fixture
guide track
corner, one side
square post







72235.



post fixture
guide track
single and double bracket
square post

72232.


Please note: When fixing to the markilux syncra / markilux construct only 2 brackets per track are needed!

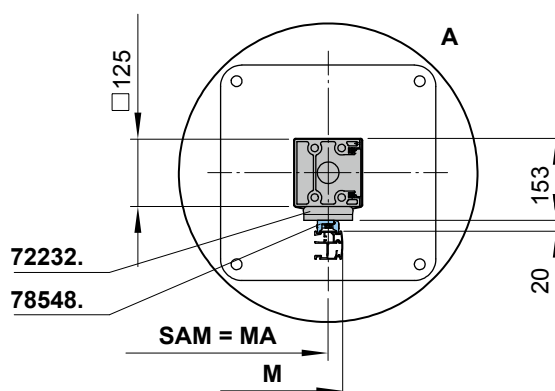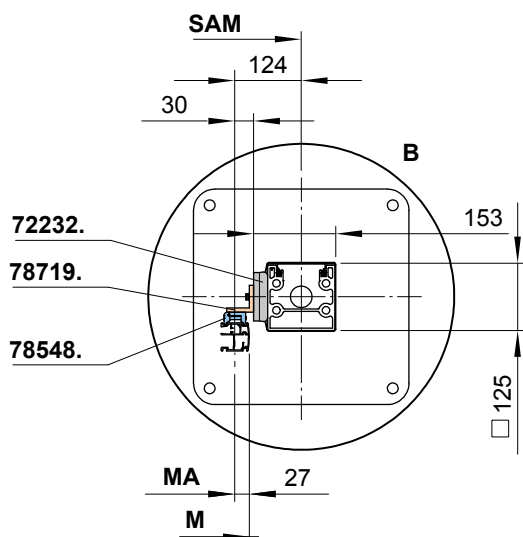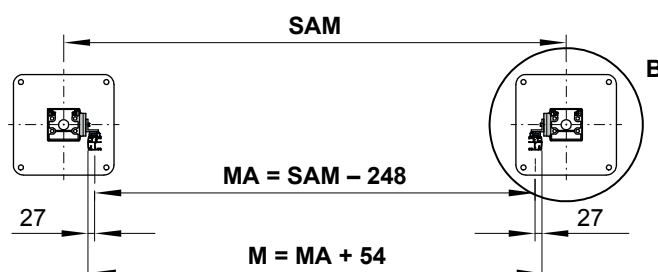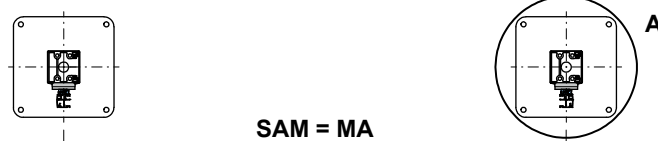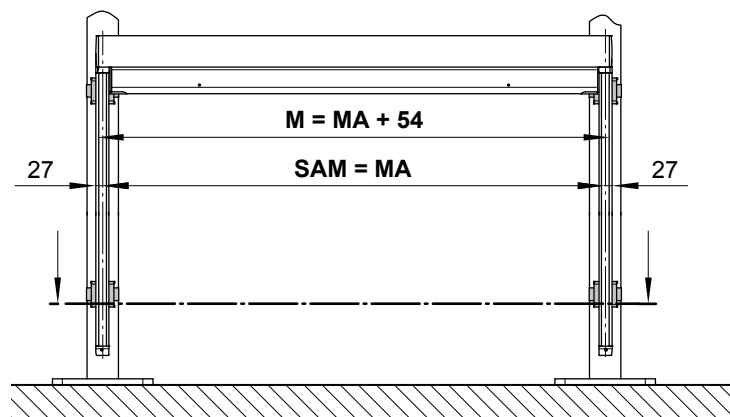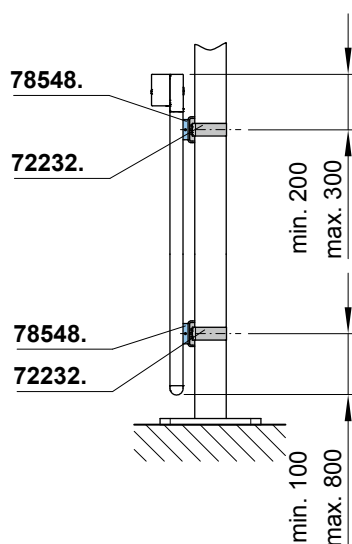

- A = detailed drawing fixture type 10
 B = detailed drawing fixture type 15
 M = overall blind width = $MA + 54$ mm
 MA = *order dimension* = blind fixture width = fixture width
 SAM = post separation centre to centre

dimensions in mm

Dimension overview in combination with the markilux construct

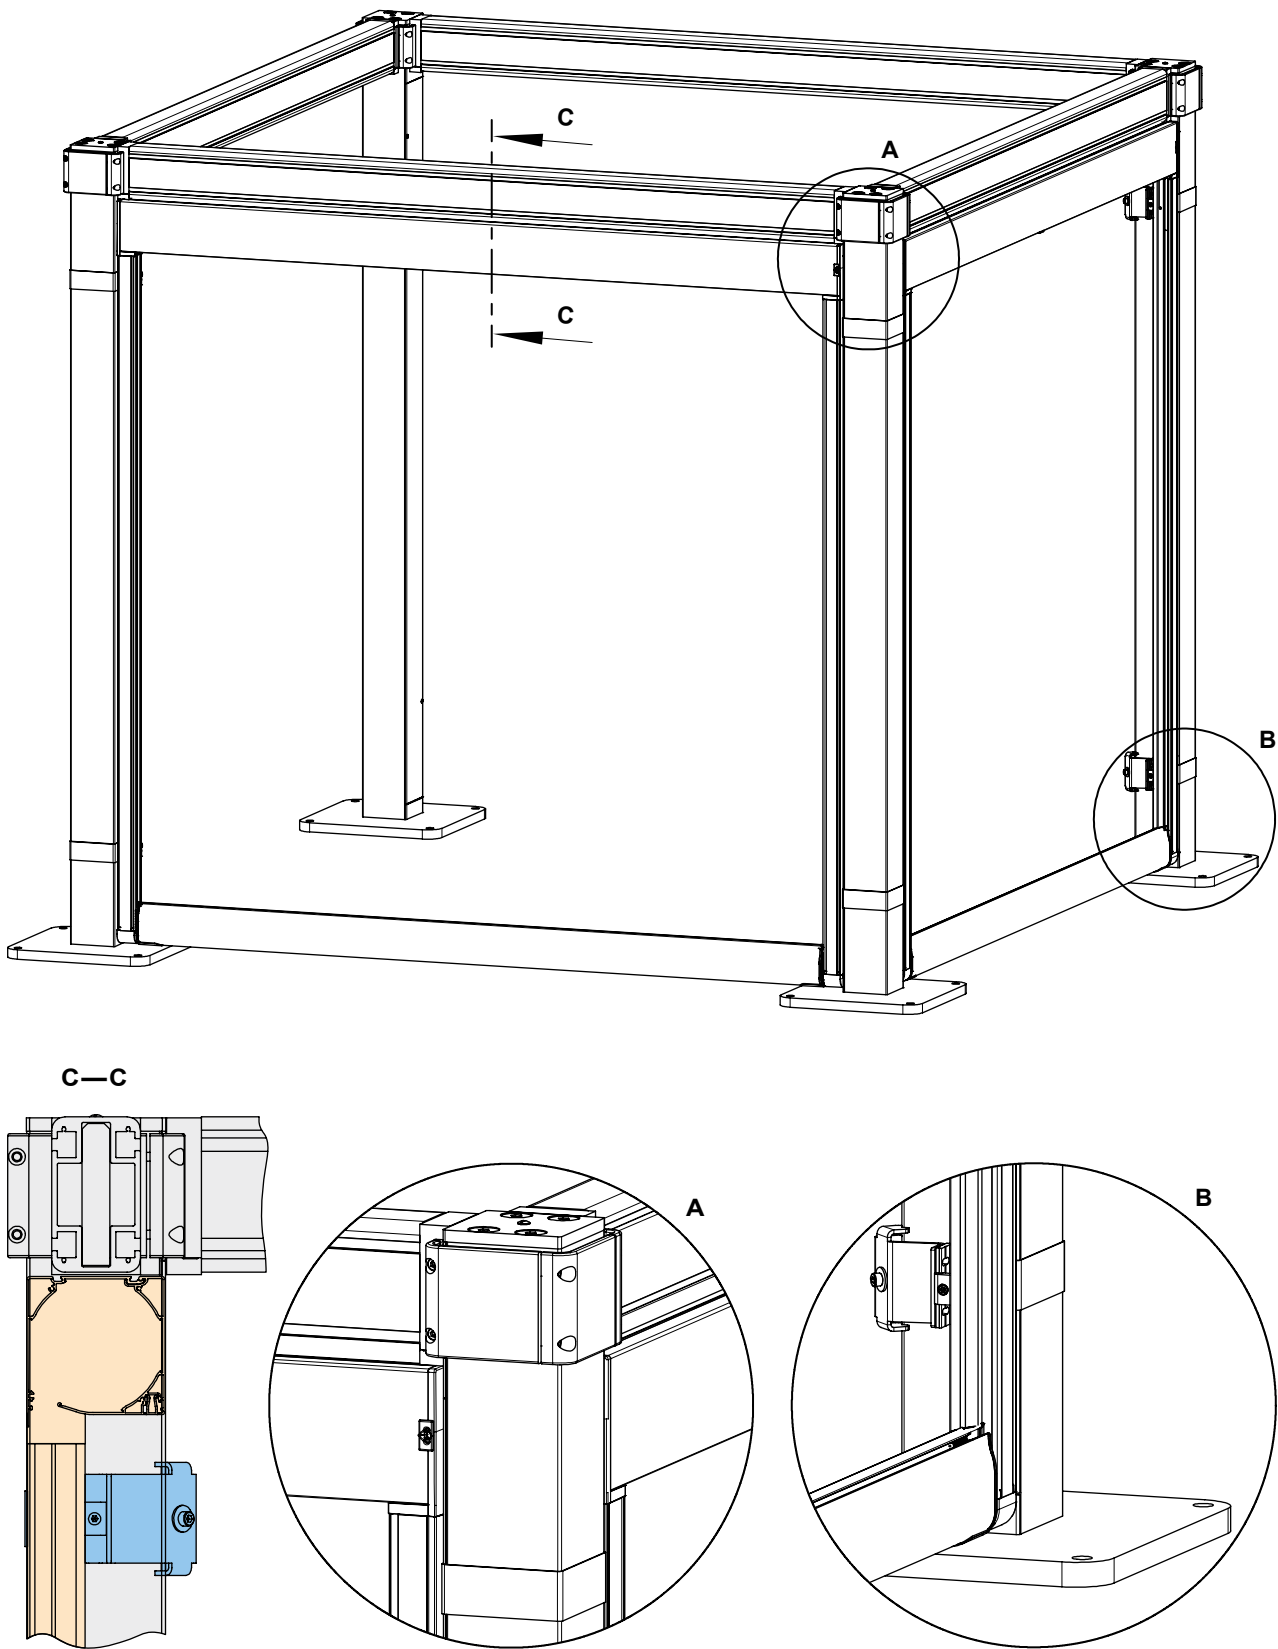


Tip: Reverse fixture of the blind with its rear to the outside! This permits the cassette to close flush with the square posts of the markilux construct, see cross section C-C.

dimensions in mm

Dimension overview in combination with the markilux syncra / construct

Fixture of one blind to a corner post


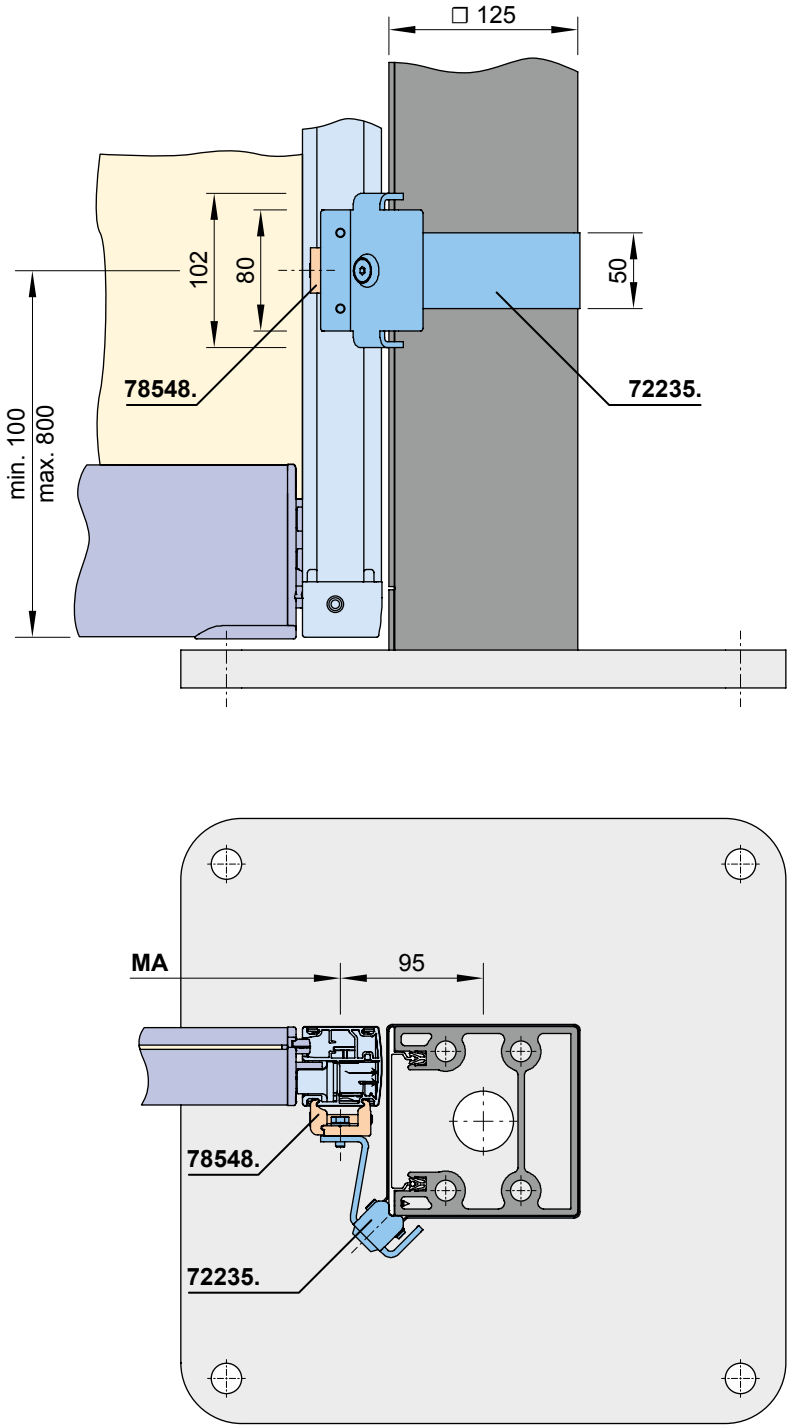


MA = order dimension = blind fixture width = fixture width

dimensions in mm

Dimension overview in combination with the markilux syncra / construct

Fixture of two blinds to a corner post

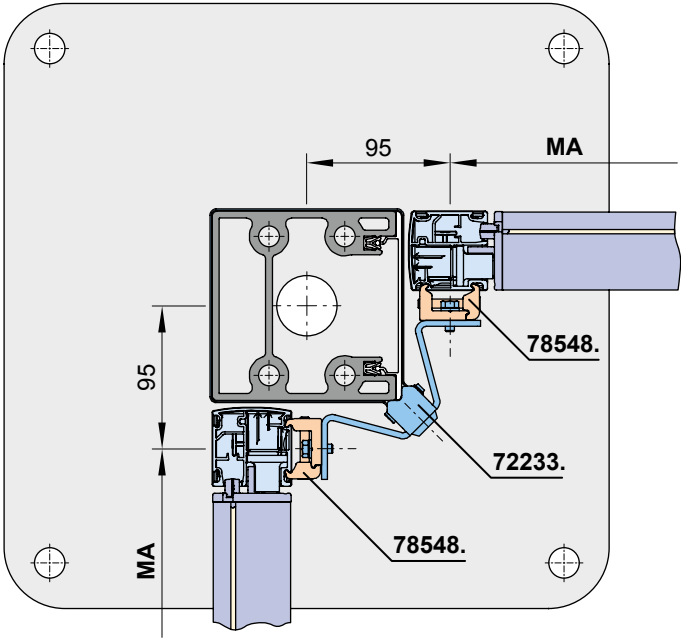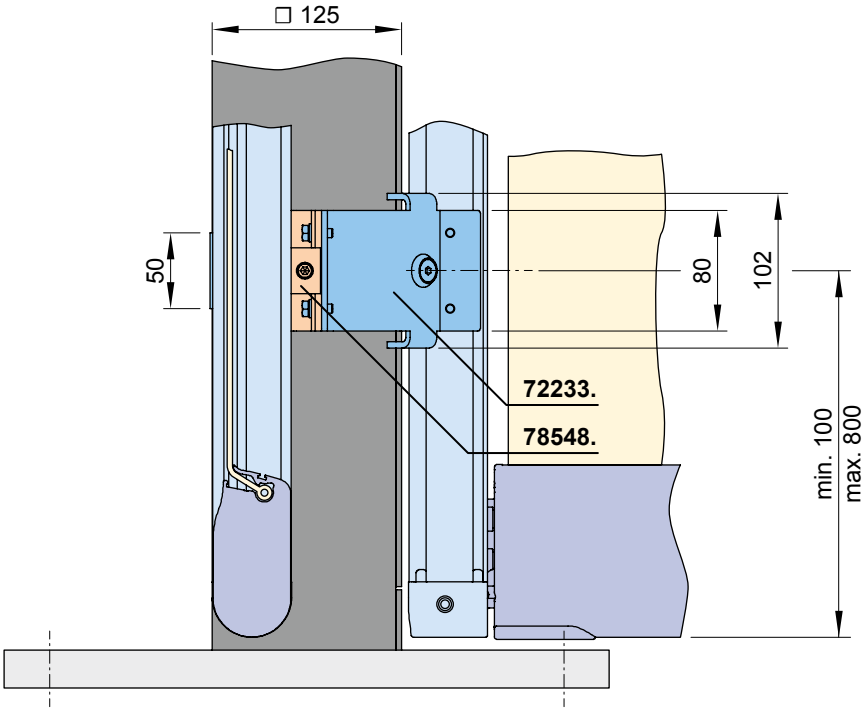


MA = order dimension = blind fixture width = fixture width

dimensions in mm

Dimension overview in combination with the markilux construct


Fixture of two blinds to a central post

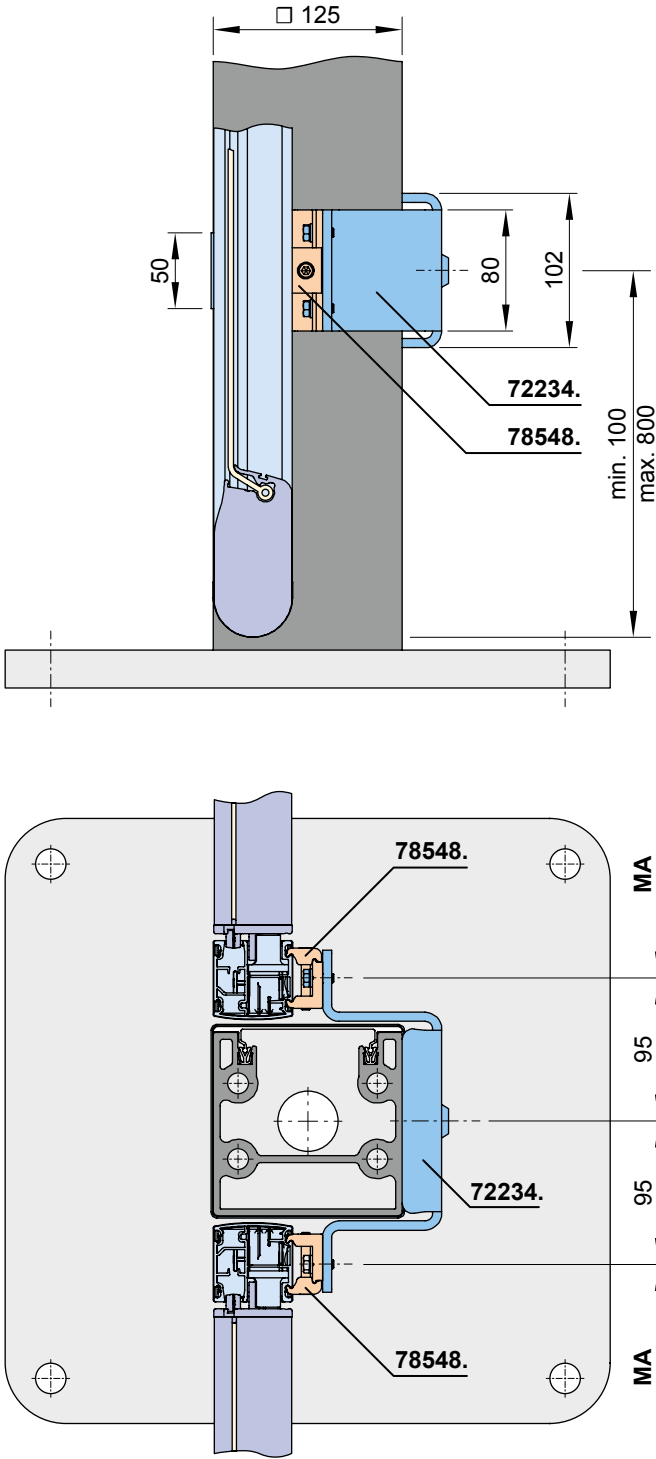

MA = order dimension = blind fixture width = fixture width

dimensions in mm

Motor cable exit point

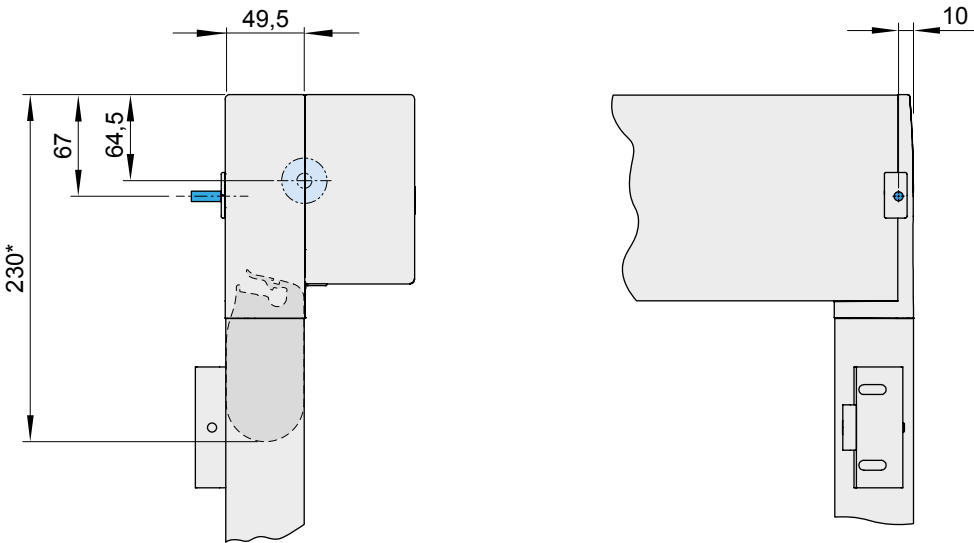

* = unit height when retracted
= standard
= optional

dimensions in mm

- 01
- 02
- 03**
- 04
- 05
- 06
- 07
- 08
- 09
- 10
- 11
- 12
- 13
- 14
- 15
- 16
- 17
- 18
- 19
- 20